


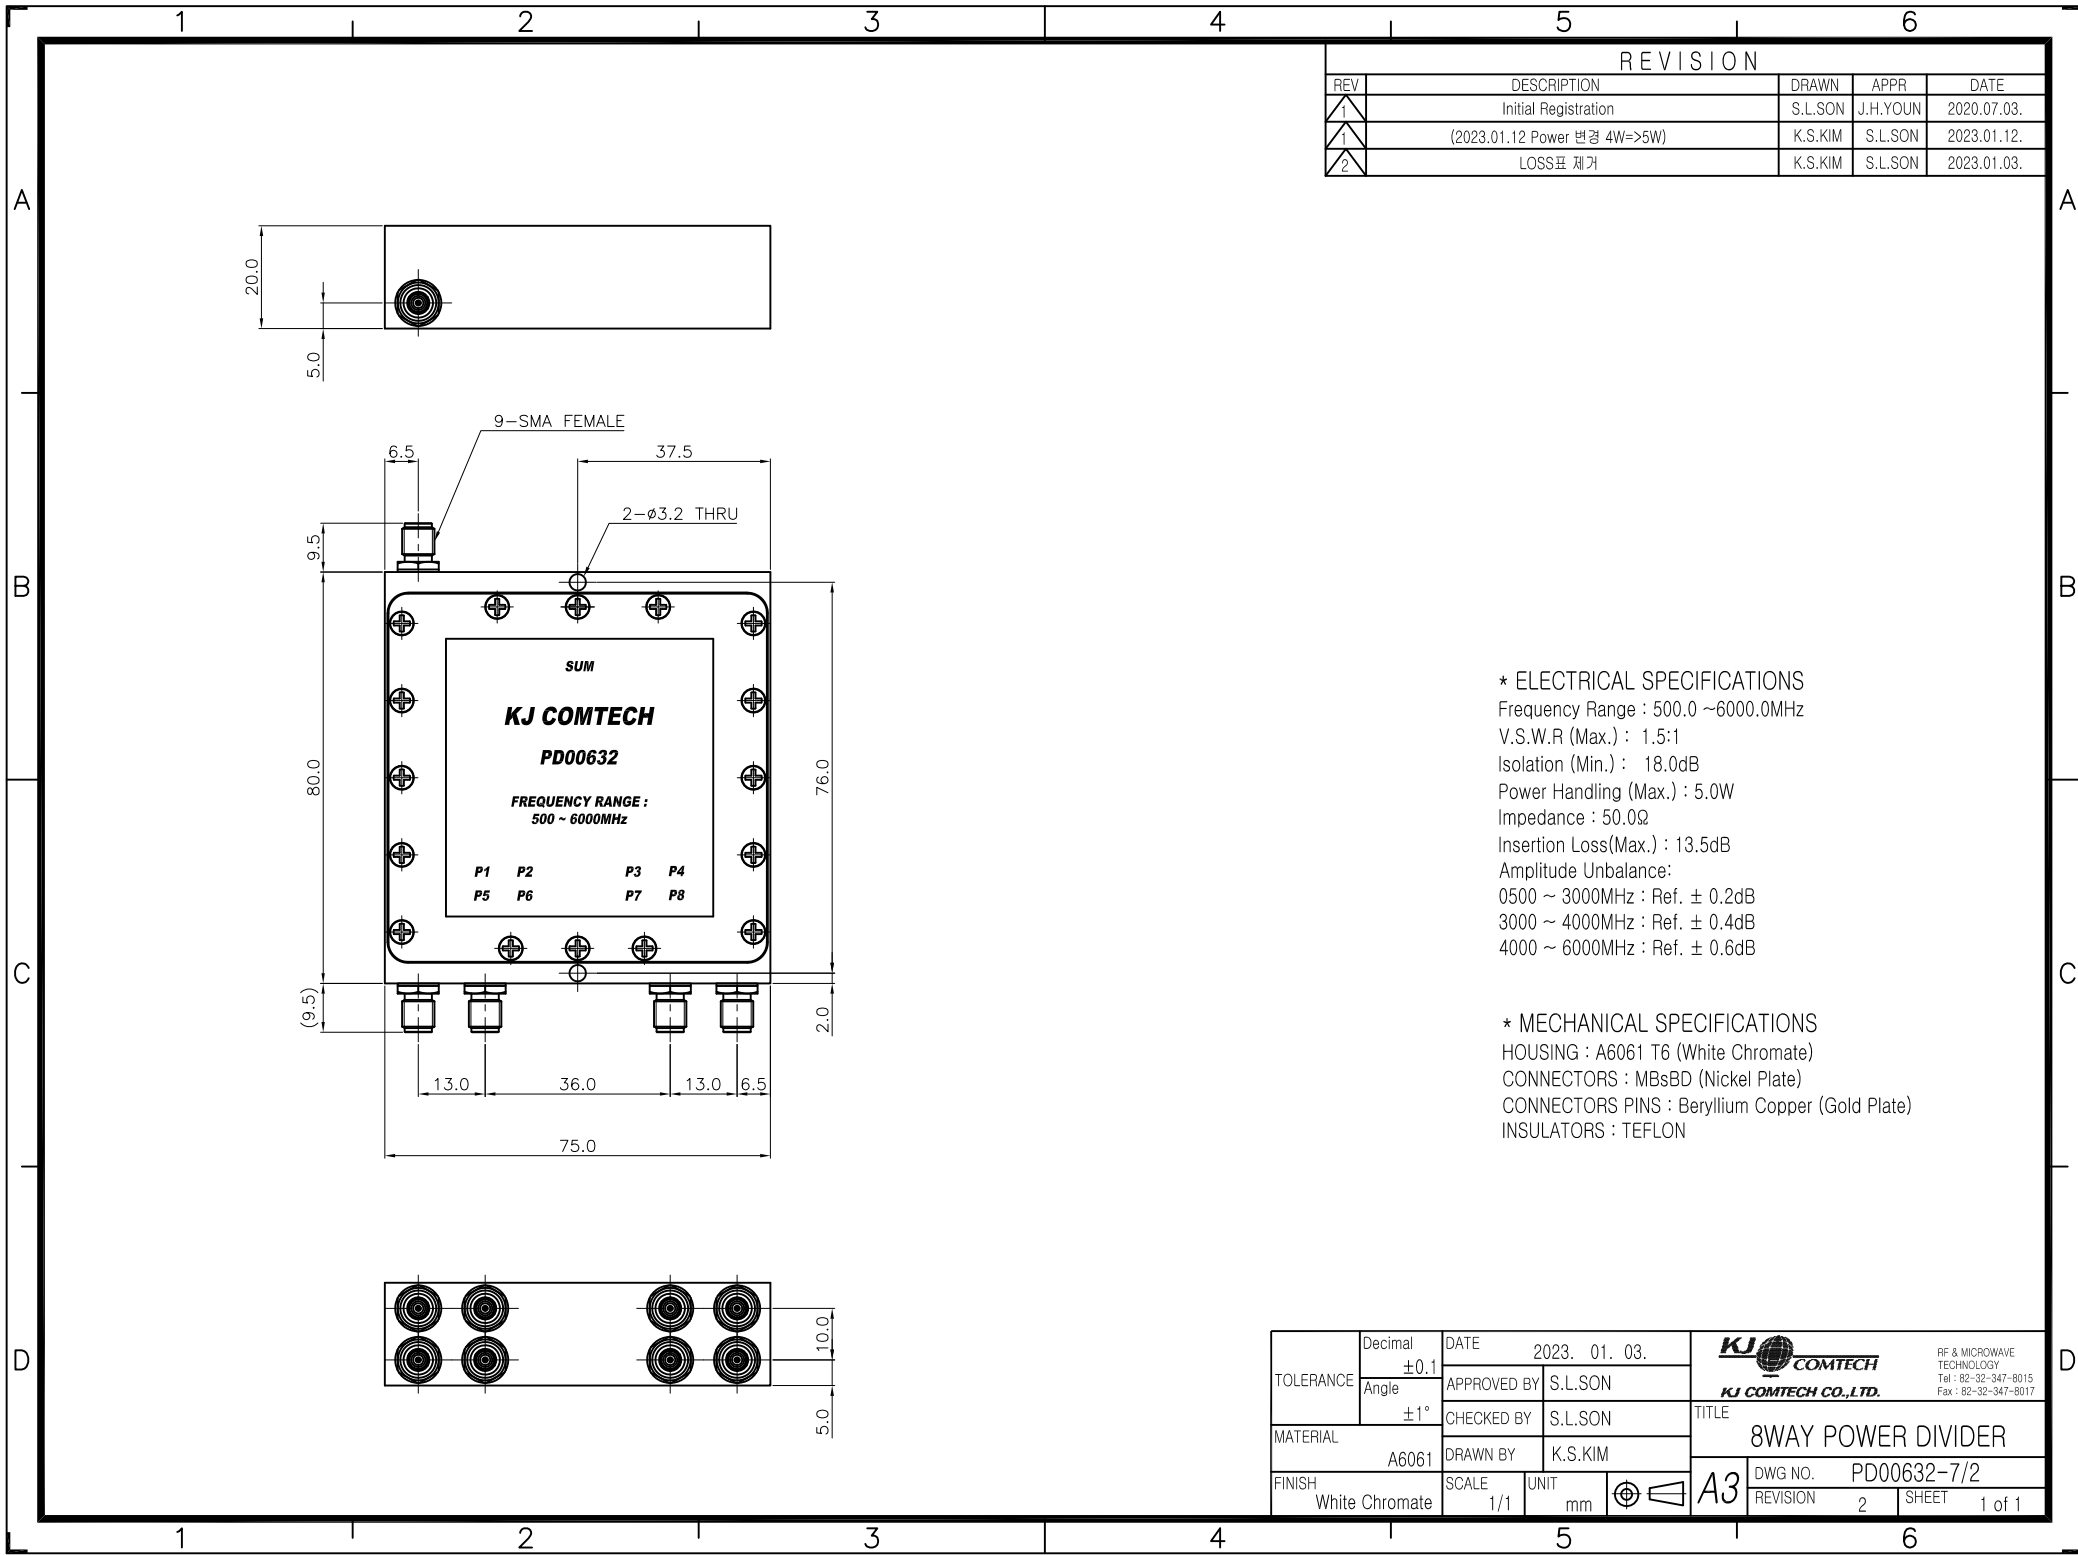

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2020.07.03.
1	(2023.01.12 Power 변경 4W=>5W)	K.S.KIM	S.L.SON	2023.01.12.
2	LOSS표 제거	K.S.KIM	S.L.SON	2023.01.03.

* ELECTRICAL SPECIFICATIONS

Frequency Range : 500.0 ~6000.0MHz
V.S.W.R (Max.) : 1.5:1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 5.0W
Impedance : 50.0Ω
Insertion Loss(Max.) : 13.5dB
Amplitude Unbalance:
0500 ~ 3000MHz : Ref. ± 0.2dB
3000 ~ 4000MHz : Ref. ± 0.4dB
4000 ~ 6000MHz : Ref. ± 0.6dB

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2023. 01. 03.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY S.L.SON		
		CHECKED BY S.L.SON		
MATERIAL A6061		DRAWN BY K.S.KIM	TITLE 8WAY POWER DIVIDER	
FINISH White Chromate	SCALE 1/1	UNIT mm	DWG NO. PD00632-7/2	
			REVISION 2	SHEET 1 of 1