


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2021.03.31.

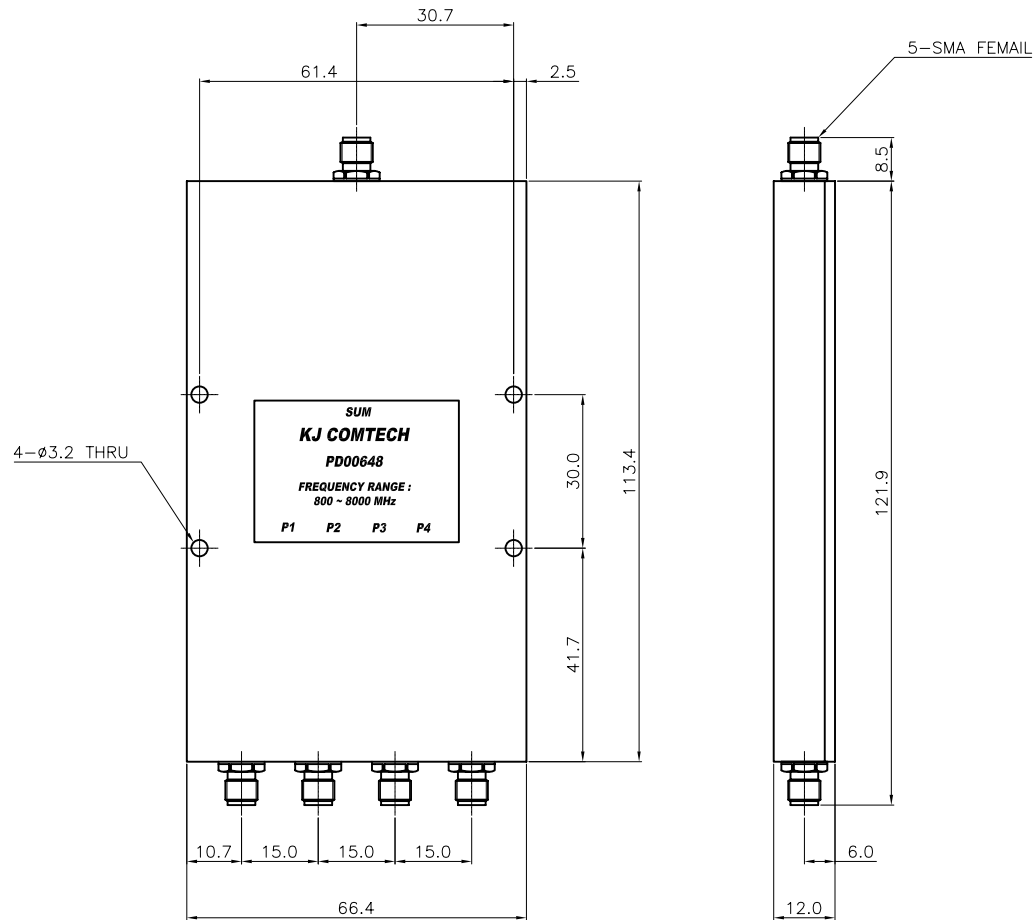

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800 ~ 8000 MHz
V.S.W.R (Max.) : 1.45
Isolation (Min.) : 16.0dB
Impedance : 50.0 Ω
Insertion Loss(Max.) : 9.0dB
Power Handling (Max.) : 1.0W

* MECHANICAL SPECIFICATIONS

HOUSING : Aluminum (White Chromate)
CONNECTORS : Brass (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2021. 03. 31.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO., LTD.	
	Angle ±1°	APPROVED BY S.L.SON		
MATERIAL A6061	FINISH White Chromate	CHECKED BY S.L.SON	TITLE 4WAY POWER DIVIDER	
		DRAWN BY K.S.KIM		
SCALE 1/1		UNIT mm	A3 	
		DWG NO. PD00648-N/1		
		REVISION 1		SHEET 1 of 1