



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.03.04.
2	Loss 표 제거	K.S.KIM	S.L.SON	2022.07.21.

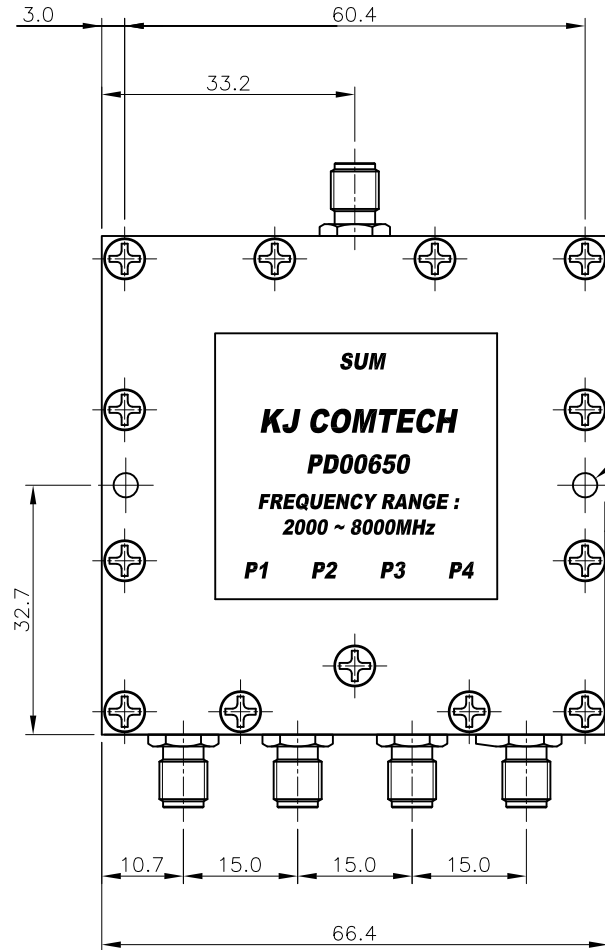

2- ϕ 3.2 THRU

5-SMA FEMALE

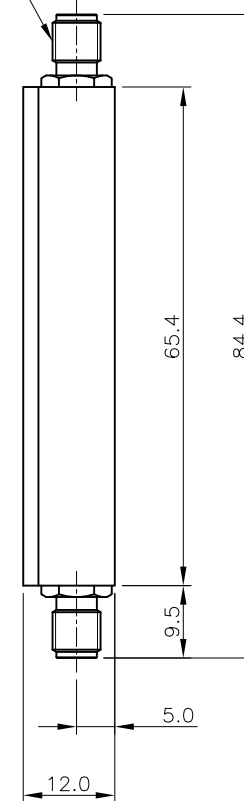

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2000 ~ 8000MHz
Insertion Loss (Max.) : 7.8dB
V.S.W.R (Max.) : 1.4 : 1
Isolation (Min.) : 18.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS :
Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal ± 0.3	DATE 2022. 07. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	S.L.SON	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	KJ COMTECH CO.,LTD. TITLE 4WAY POWER DIVIDER
		DRAWN BY	K.S.KIM	
FINISH White Chromate		SCALE	1/1	A4 DWG NO. PD00650-7/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	