



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.09.20.
2				

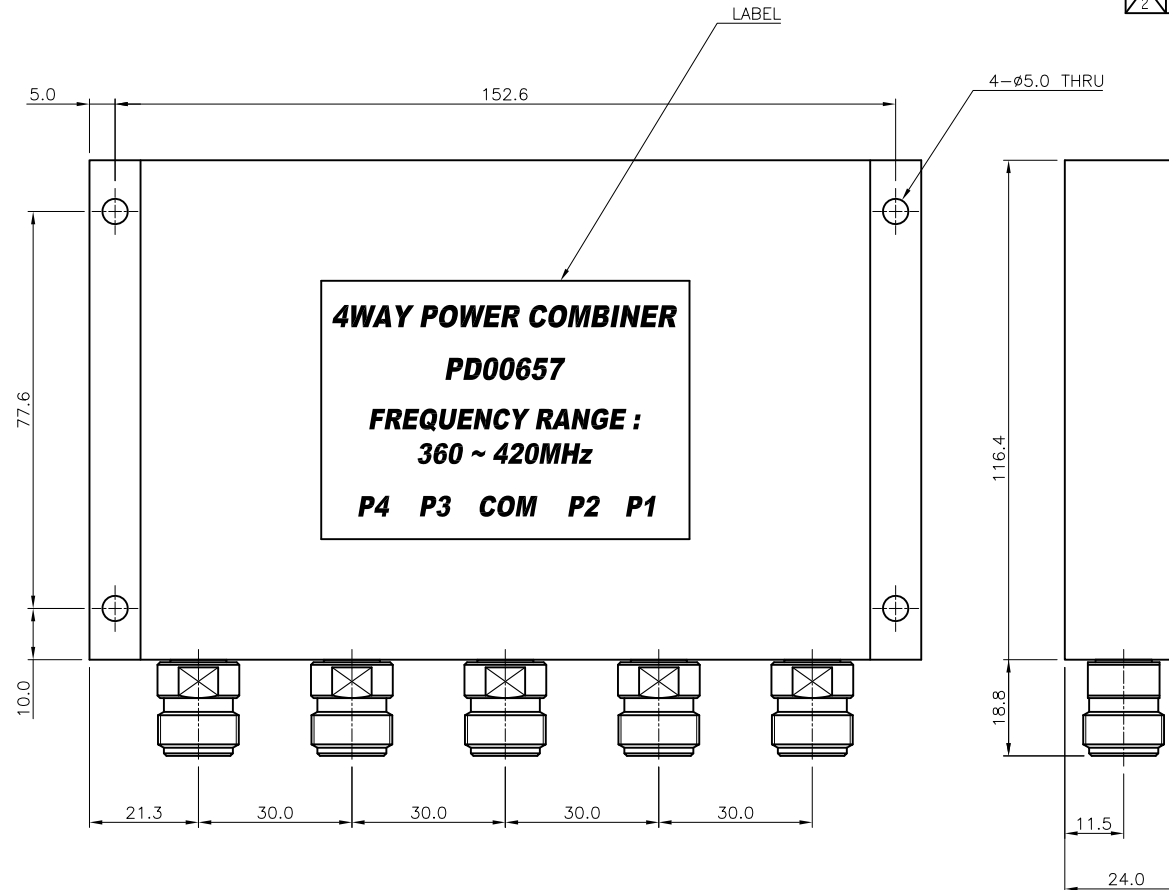

- * ELECTRICAL SPECIFICATIONS
Frequency Range : 360.0 ~ 420.0 MHz
Insertion Loss (Max.) : 7.0dB
V.S.W.R Input (Max.) : 1.2 : 1
V.S.W.R Output (Max.) : 20dB
Isolation Input to Input (Min.) : 30dB (380.0 ~ 390.0 MHz)
Output (Max.) : 20dB
Power Handling (Max.) : 10.0W
Impedance : 50Ω
- * MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (SUICO Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON
- * ENVIRONMENTAL SPEC
IP 65

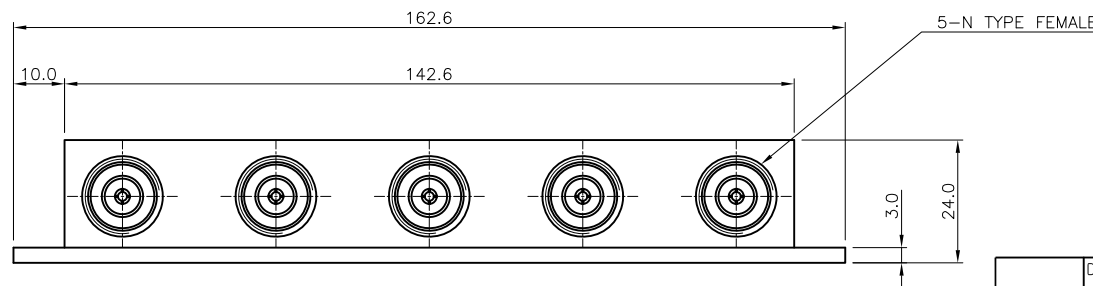

TOLERANCE	Decimal ±0.3	DATE	2022. 09. 20.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.L.SON	
MATERIAL	A6061	CHECKED BY	S.L.SON	TITLE 4WAY POWER COMBINER
		DRAWN BY	K.S.KIM	
FINISH	White Chromate	SCALE	1/1	DWG NO. PD00657-7/1
		UNIT	mm	REVISION 1 SHEET 1 of 1