
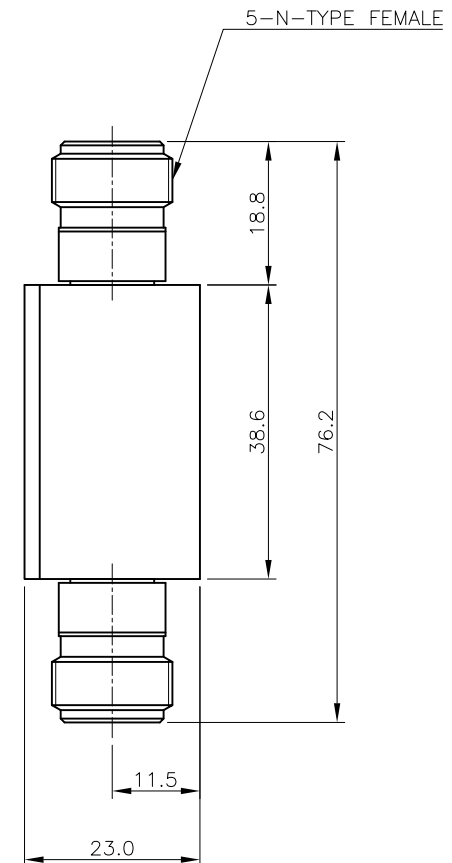


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2023.03.09.

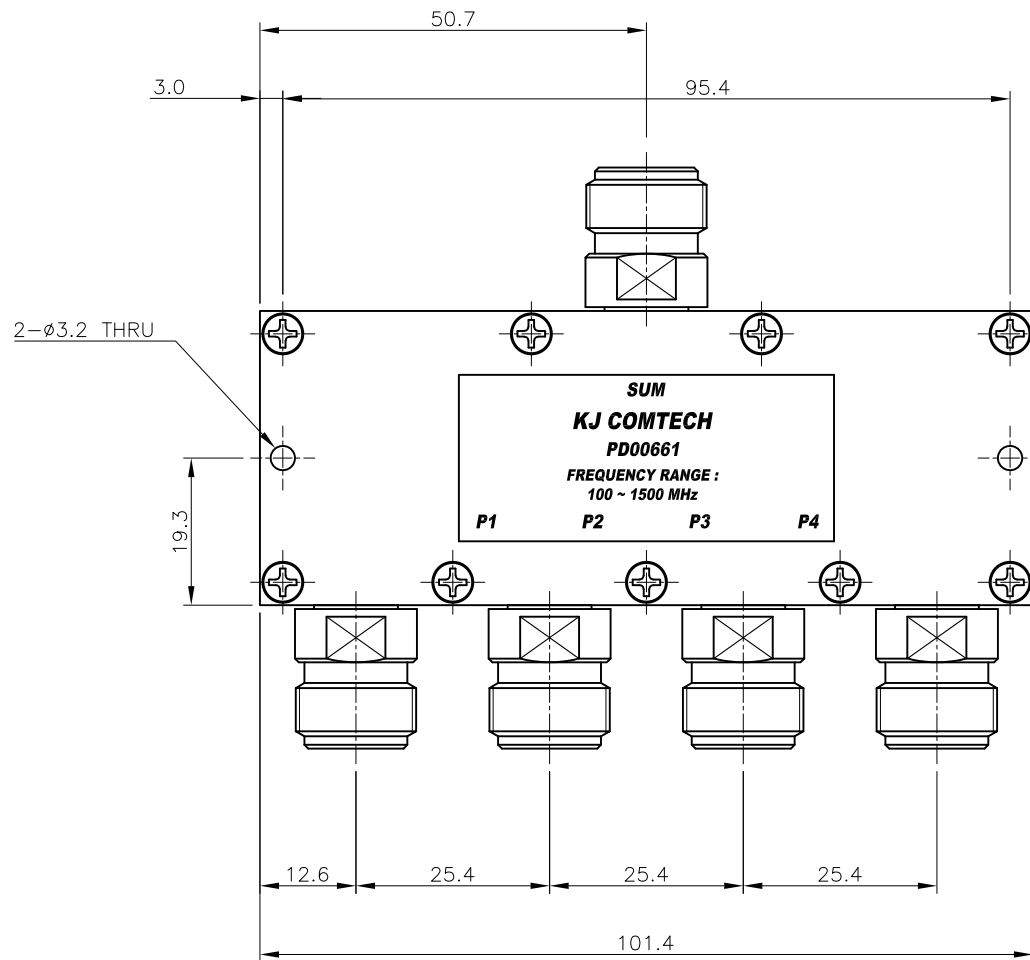

* ELECTRICAL SPECIFICATIONS
Frequency Range : 100.0~1500 MHz
Insertion Loss (Max.) : 8.0dB
Flatness(Max.) : 1.5dB
V.S.W.R (Max.) : 2.9 : 1
Isolation (Min.) : 16.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2023. 03. 07.		
	Angle	APPROVED BY	S.L.SON	
MATERIAL	±1°	CHECKED BY	S.L.SON	TITLE 4WAY POWER DIVIDER
	A6061 T6	DRAWN BY	K.S.KIM	
FINISH	White Chromate	SCALE	1/1	A4
		UNIT	mm	
				DWG NO. PD00661-7/1 REVISION 1 SHEET 1 of 1