
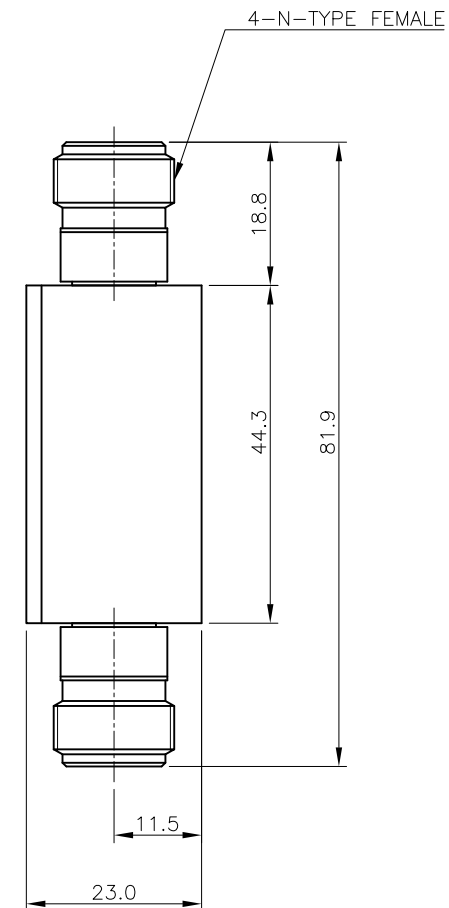


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2023.03.09.

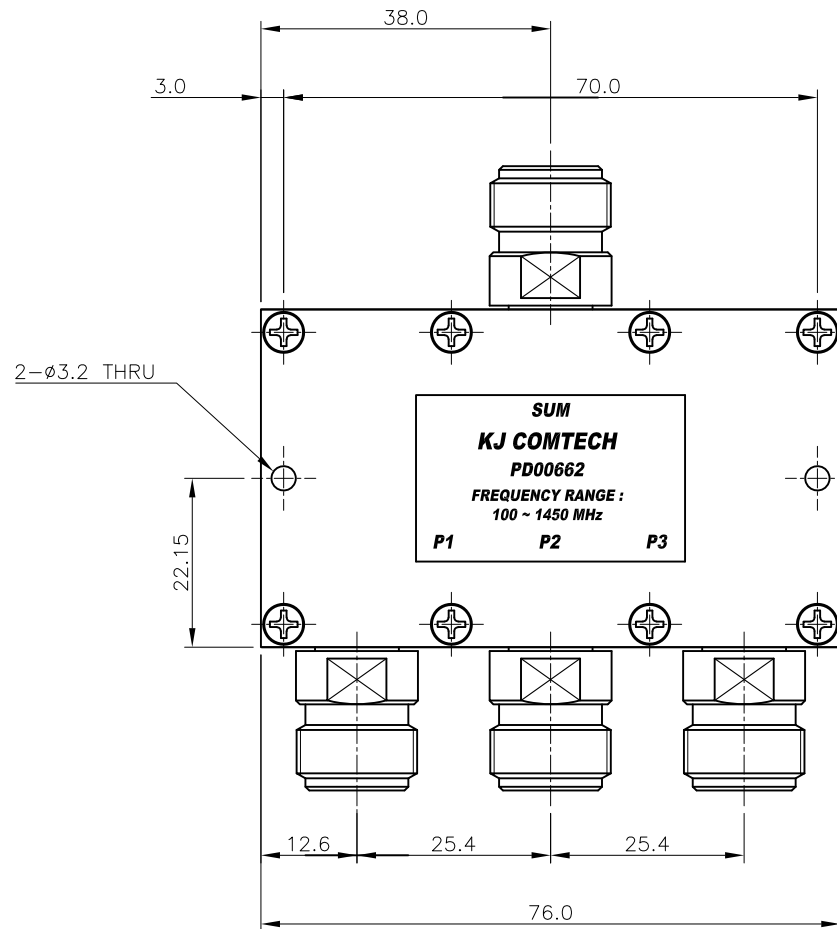

* ELECTRICAL SPECIFICATIONS
Frequency Range : 100.0~1450 MHz
Insertion Loss (Max.) : 8.0dB
Flatness(Max.) : 1.2dB
V.S.W.R (Max.) : 2.0 : 1
Isolation (Min.) : 11.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE2023. 03. 07.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON		
	±1°	CHECKED BY	S.L.SON		
MATERIAL	A6061 T6	DRAWN BY	K.S.KIM		TITLE 3WAY POWER DIVIDER
FINISH White Chromate	SCALE 1/1	UNIT mm			
				DWG NO. PD00662-7/1	SHEET1 of 1
				REVISION1	