


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.03.11.

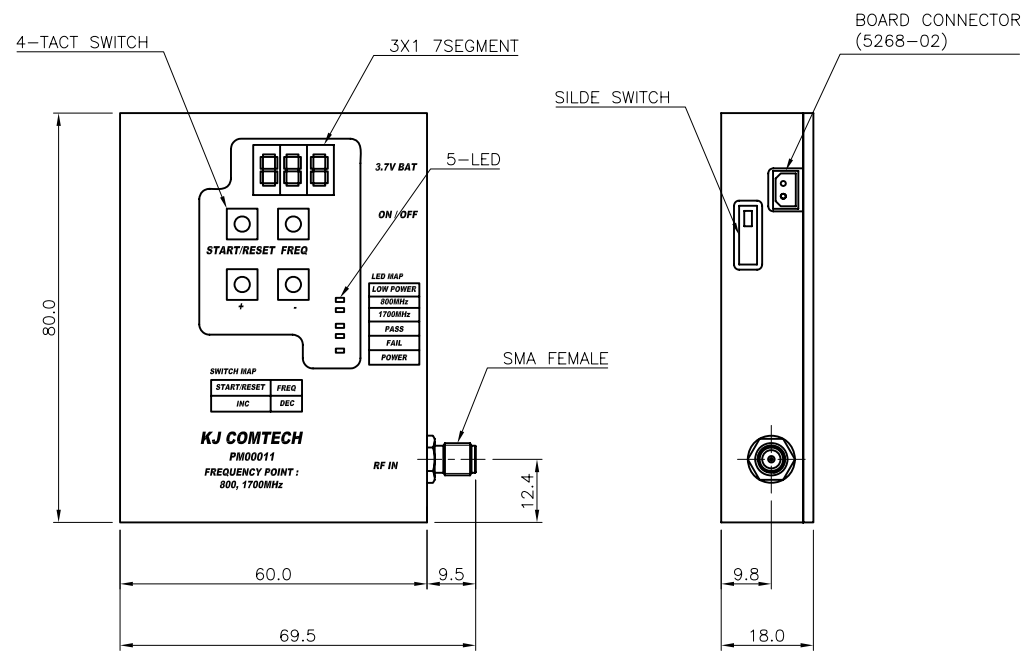

* ELECTRICAL SPECIFICATIONS
 FREQUENCY : 800MHz, 1700MHz
 POWER DETECT RANGE : -45~-80dBm
 Error Range of Each Power Step : ± 2 dBm
 Impedance : 50 Ω
 Input DC Voltage : 3.5 ~ 5V
 Low Battery : 3.2~3.3 V 이하에서 표시

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061(White Chromate)
 CONNECTORS : MBsBD (Ni Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON
 MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2014. 03. 19.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY T.J.KIM	TITLE Power Detector (800MHz/1700MHz)	
		DRAWN BY S.L.SON		
SCALE 1/1		UNIT mm	A3	
				DWG NO. PM00011-7/1
			REVISION 1	SHEET 1 of 1