


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2020.03.04.

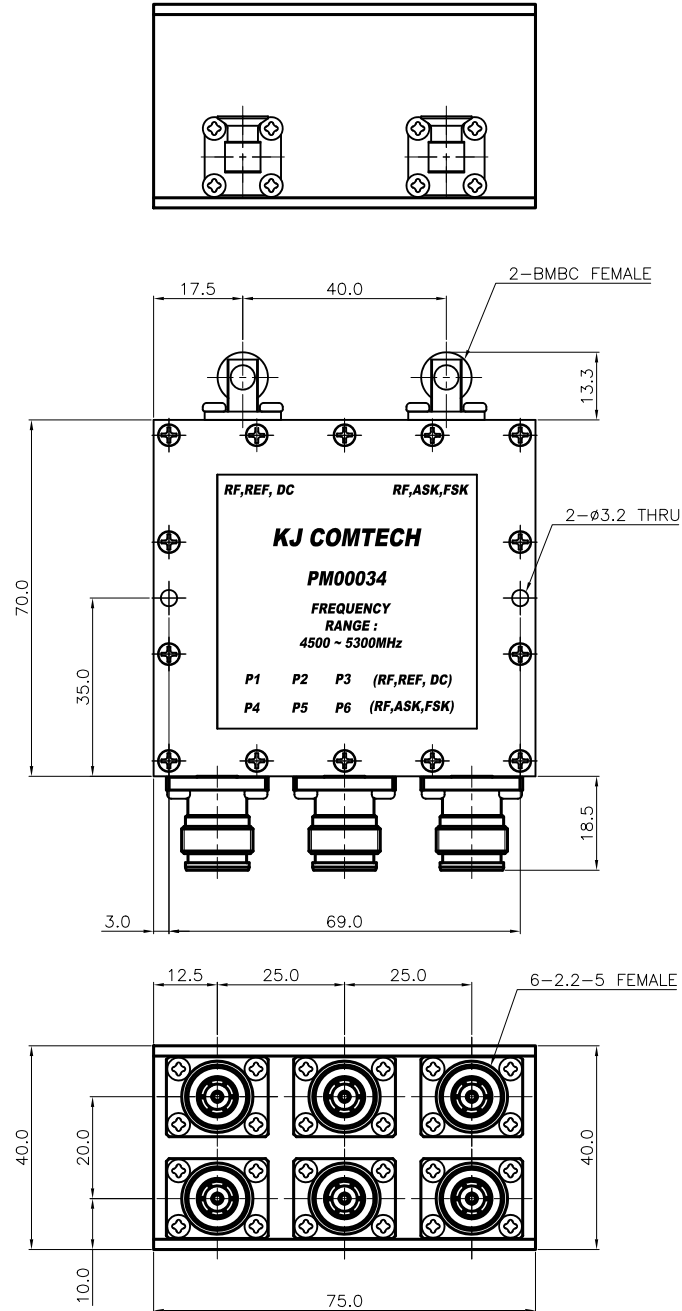

* ELECTRICAL SPECIFICATIONS

Frequency Range : 4500.0 ~ 5300.0MHz

V.S.W.R (Max.) : 1.3 : 1

Isolation (Min.) : 18.0dB

Insertion Loss (Max.) : T.B.D (RF,ASK,FSK)

T.B.D (RF, REF, DC)

DC RATING (INPUT) : 48V, 3A

Power Handling (Max.) : 1.0W

Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal ±0.1	DATE 2020. 3. 4.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY J.H.YOUN	
MATERIAL A6061	DRAWN BY S.L.SON	CHECKED BY	TITLE 3WAY POWER DIVIDER / BIAS T
		SCALE 1/1	
FINISH White Chromate	UNIT mm		DWG NO. PM00034-7/1 REVISION 1 SHEET 1 of 1