
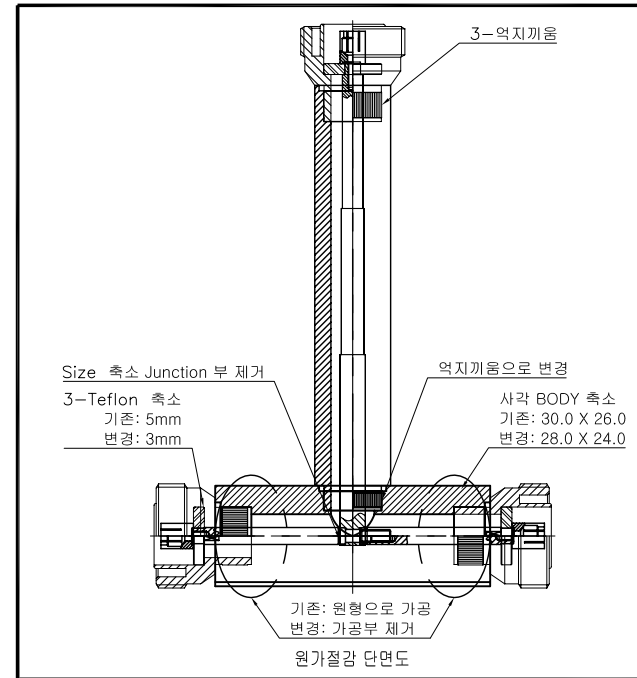
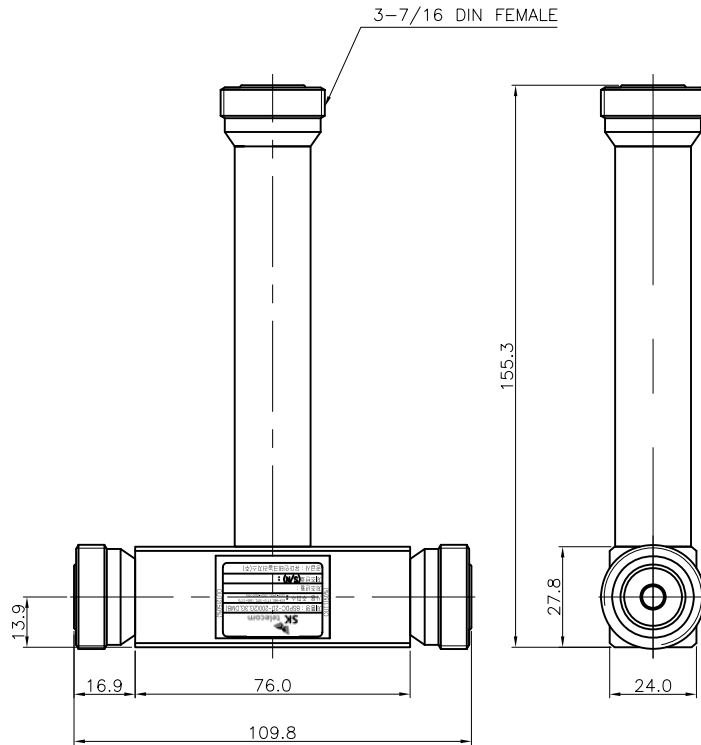


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.I.CHO	J.H.YOUN	2004.04.21.
2	PIM 5차 상호변조 SPEC 추가	K.I.CHO	J.H.YOUN	2009.03.06.
3	특성개선 및 조립성 향상	K.I.CHO	J.H.YOUN	2009.03.16.
4	[설변의뢰 No.: 200909-0008] 제조사에서 공급사로 표기 변경	K.I.CHO	J.H.YOUN	2009.09.10.
5	[설변의뢰No.:201112-0007] LTE 대역 추가	I.C.KIM	J.H.YOUN	2012.03.19.
6	[영비-2012-029-1] 원가절감을 목적으로 형상축소	I.C.KIM	J.H.YOUN	2012.04.18.
7	원가절감을 목적으로 재질변경	S.L.SON	J.H.YOUN	2013.06.19.
8	출력부 길이변경 25mm -> 40mm	S.L.SON	J.H.YOUN	2013.07.16.
9	출력부 길이변경 40mm -> 35mm	S.L.SON	J.H.YOUN	2013.10.18.
10	외관 축소권	T.J.KIM	J.H.YOUN	2014.09.24.
A	재질 변경 권 (알루미늄 -> 황동)	T.J.KIM	J.H.YOUN	2014.12.02.
B	원가절감 (나사탭 + 억지끼움)	S.L.SON	J.H.YOUN	2016.11.29.
B	원가절감 (억지끼움)	S.L.SON	J.H.YOUN	2016.11.29.

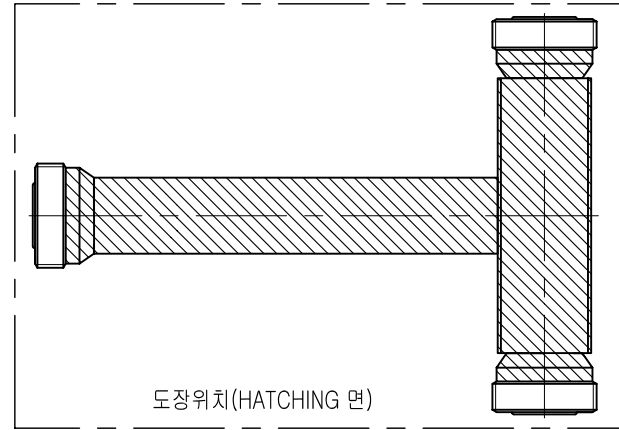

* ELECTRICAL SPECIFICATIONS

Frequency Range : 819.0 ~ 960.0MHz
 1710.0~1870.0MHz
 1885.0 ~ 2170.0MHz
 2300.0 ~ 2400.0MHz
 2500.0 ~ 2690.0MHz

Insertion Loss (Max.) : 3.3dB
 Input V.S.W.R (Max.) : 1.2 : 1
 PIM (Max.) : 3th -150.0dBc (@43.0dBm 2Tone)
 Power Handling (Max.) : 200.0W
 Impedance : 50Ω ± 5Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 (샌드#20 KJ컴텍 Texture,
 Lucoat SR 브라운 EM 4133무광)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2016. 11. 29.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	T.J.KIM	TITLE 2WAY POWER SPLITTER
		DRAWN BY	S.L.SON	
FINISH	주기란 참고	SCALE	1/1	DWG NO. PS00009-6/B REVISION B SHEET 1 of 1
		UNIT	mm	