


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2015.06.24.
2	Catalogue	S.L.SON	J.H.YOUN	2015.07.24.

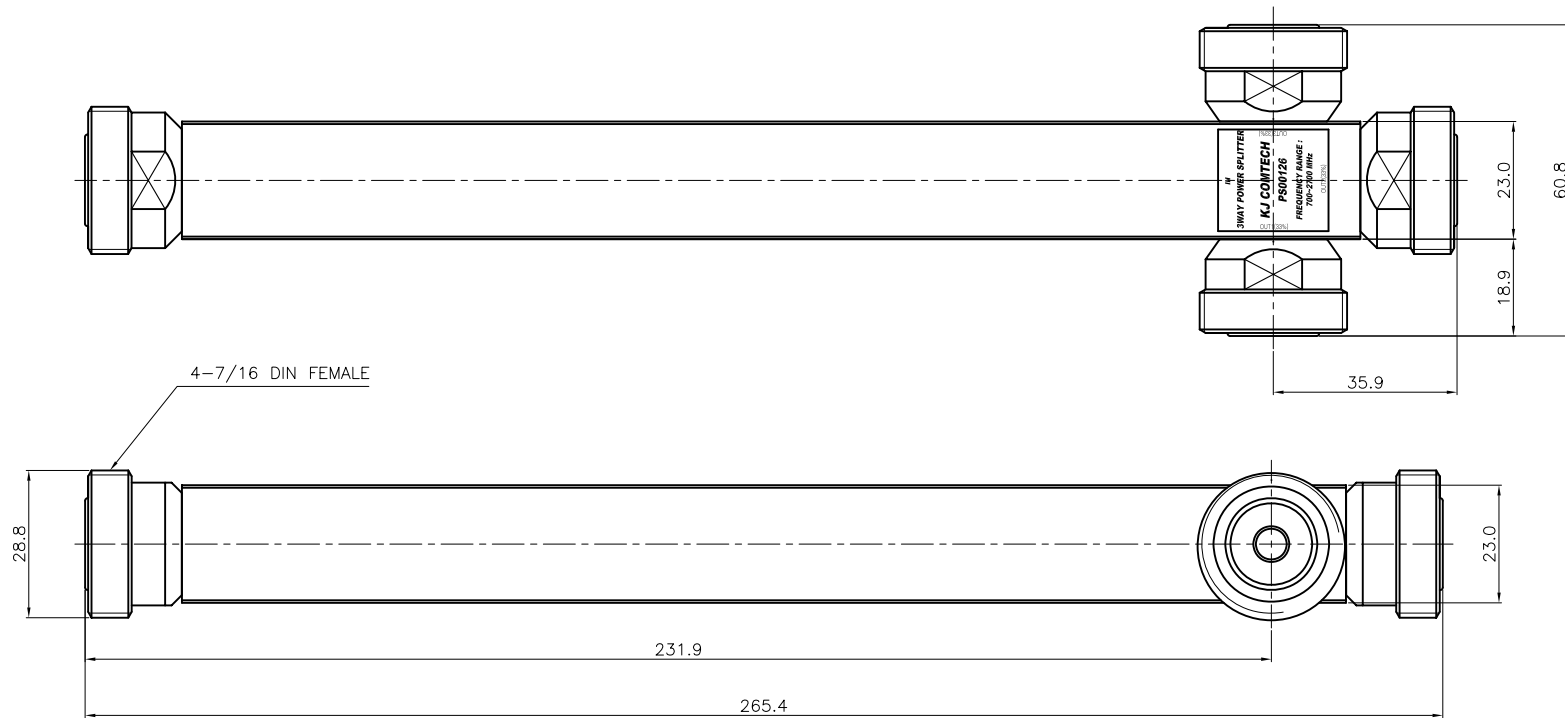


4-7/16 DIN FEMALE

* ELECTRICAL SPECIFICATIONS
Frequency Range : 600 ~ 3600 MHz
Insertion Loss (Max.) : 5.2dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -150.0dBc
(@43.0dBm 2Tone)
Power Handling (Max.) : 300.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (LUCOAT SR BROWN, Liquid Matt Texture)
CONNECTORS : MBsBD(C3604BD-F) (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
-40~+60 Degree
IP67



HATCHING 면 도장 부위

TOLERANCE	Decimal	DATE	2015. 07. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY				J.H.YOUN		
MATERIAL	±1°	CHECKED BY	T.J.KIM		TITLE 3WAY POWER SPLITTER			
	A6061	DRAWN BY	S.L.SON					
FINISH lucoat SR Brown	SCALE	1/1	UNIT	mm	A3	DWG NO.	PS00126-6/2	
						REVISION	2	SHEET