
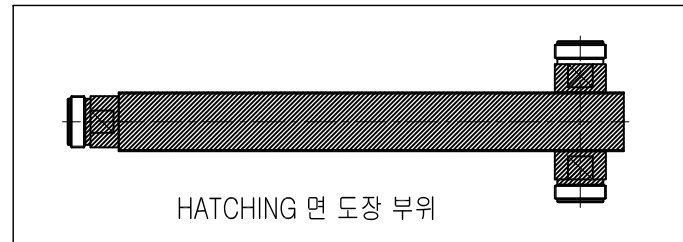


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Catalogue	S.L.SON	J.H.YOUN	2015.10.19.

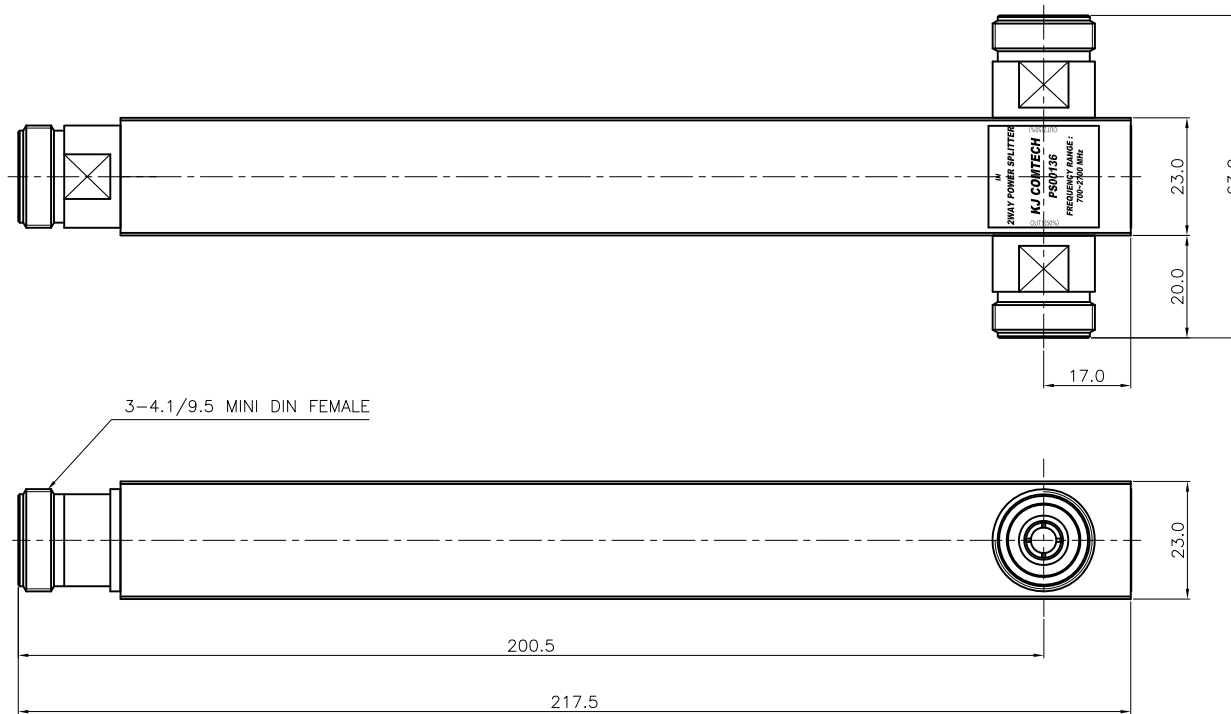

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700 ~ 2700 MHz
Insertion Loss (Max.) : 3.3dB
Input V.S.W.R (Max.) : 1.2 : 1
PIM (Max.) : 3th -150.0dBc
(@43.0dBm 2Tone)
Power Handling (Max.) : 300.0W
Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (DIC-547, Liquid Matt Texture)
CONNECTORS : MBsBD(C3604BD-F) (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
-40~+70°C
IP68

TOLERANCE	Decimal	DATE	2015. 10. 19.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. 2WAY POWER SPLITTER
	A6061	DRAWN BY	S.L.SON	
FINISH	DIC-547(Ivory)	SCALE	1/1	A3 DWG NO. PS00136-6/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	