


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.I.CHO	J.H.YOUN	2010.06.11.
2	내부 전원 변경	K.I.CHO	J.H.YOUN	2010.11.04.
3	설번처리(설번201404-0010 근거)	T.J.KIM	J.H.YOUN	2014.05.20.

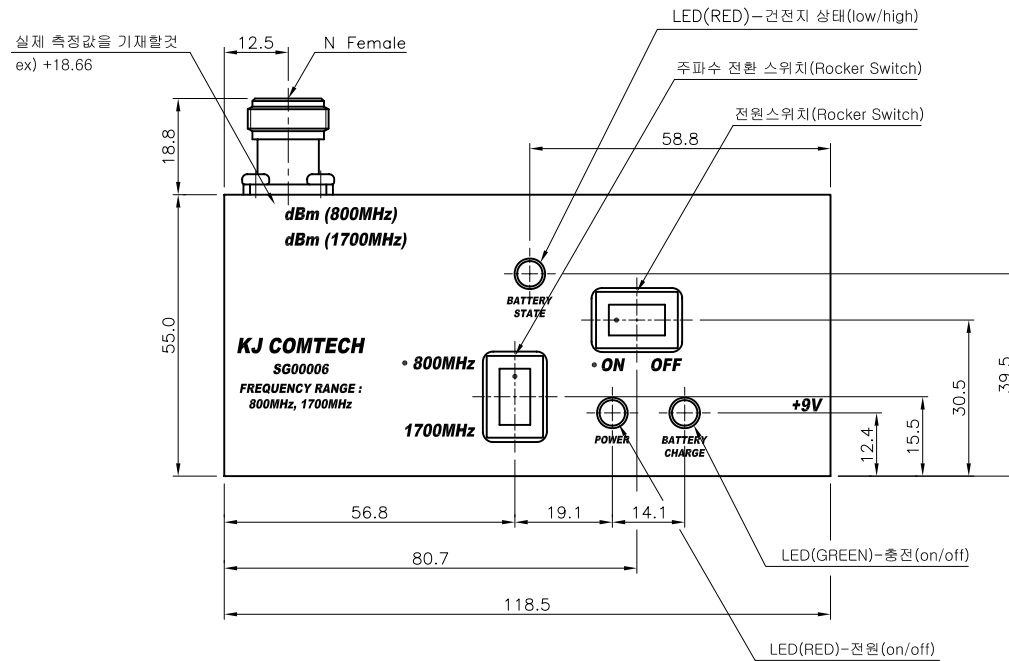

* ELECTRICAL SPECIFICATIONS

PARAMETERS	SPECIFICATION		COMMENT
Operating Frequency	800.0MHz	1700.0MHz	
Output Level	+19dBm (±2dBm)		
Impedance	50Ω		
Supply Voltage	9V		
Operating Current	190mA		

* MECHANICAL SPECIFICATIONS

HOUSING : A6061(White Chromate)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON
MARKING COLOR : BLACK

* 주 기

- 내부에 1200mAh 3.7V BATTERY 내장.
- BATTERY로 4시간 사용 가능.

TOLERANCE	Decimal ±0.3	DATE 2014. 05. 20.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY J.H.YOUN				
MATERIAL A6061 T6	FINISH White Chromate	CHECKED BY S.L.SON		TITLE Signal Generator (800MHz,1700MHz/+19dBm)		
		DRAWN BY T.J.KIM				
SCALE 1/1		UNIT mm	A3	DWG NO. SG00006-7/3		
				REVISION 3	SHEET 1 of 1	