| REVISION | | | | |
|---|---|---|---|---|
| REV | DESCRIPTION | DRAWN | APPR | DATE |
| 1 | Initial Registration | S.L.SON | J.H.YOUN | 2012.11.09. |
| 2 | 무게 절감 및 날카로운 모서리 제거 | S.L.SON | J.H.YOUN | 2013.05.30. |

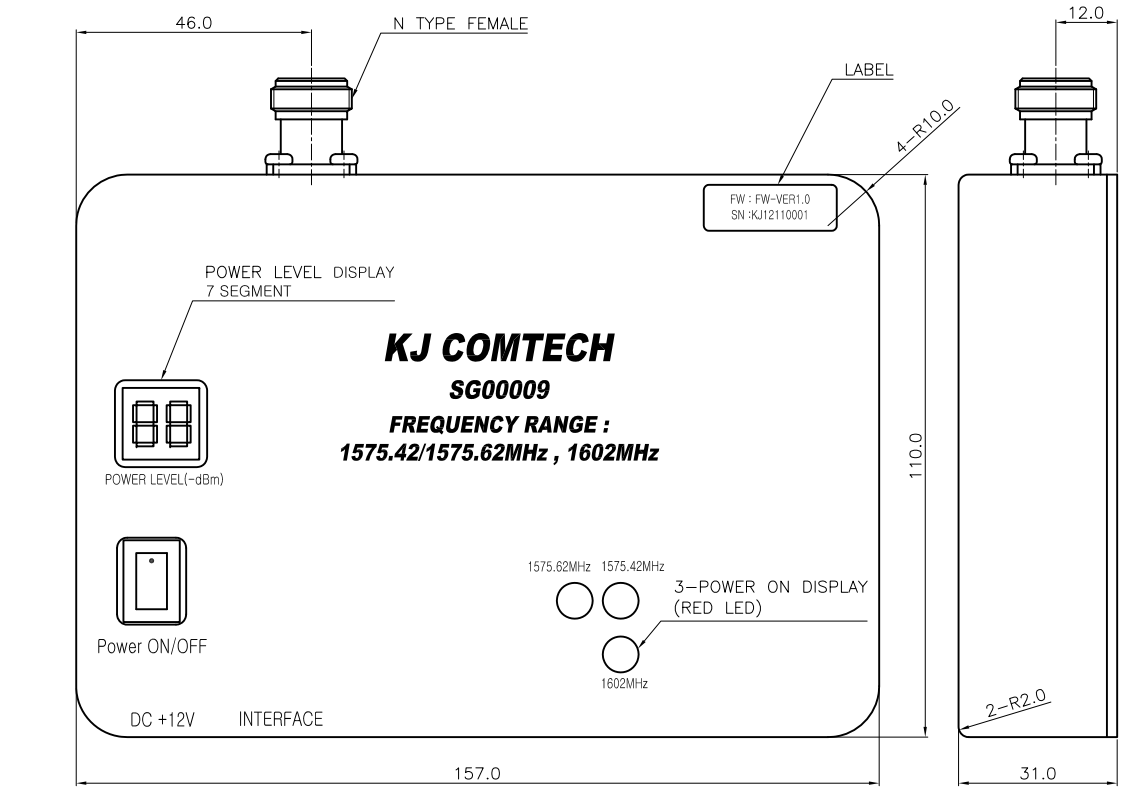


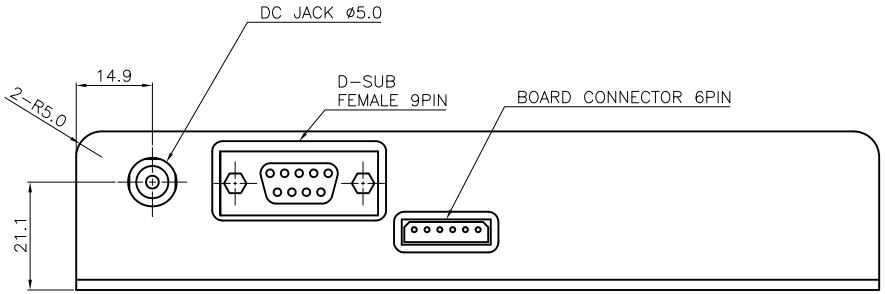


* ELECTRICAL SPECIFICATIONS
Frequency Range : 1575.42/1575.62MHz
1602MHz (±2.5ppm)
Variable Power Range : -40~-97dBm (1dB Step)
Error Range of Each Power Step : ± 0.5dBm
Impedance : 50Ω
Input DC Voltage : 12V

* MECHANICAL SPECIFICATIONS
HOUSING : A6062 (White Chromate)
CONNECTORS : MBsBD (Ni Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ETC
전원 ADAPTER 별도 포장

| | | | | |
|---|---|---|---|---|
| TOLERANCE | Decimal ±0.1 | DATE 2013. 05. 30. | KJ COMTECH KJ COMTECH CO.,LTD. | RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 |
| | Angle ±1° | APPROVED BY J.H.YOUN | | |
| MATERIAL A6061 | | CHECKED BY S.L.SON | TITLE Signal Generator | |
| | | DRAWN BY J.H.YOUN | | |
| FINISH White Chromate | | SCALE 1/1 UNIT mm | A3 | DWG NO. SG00009-7/1 |
| | | | | REVISION 1 SHEET 1 of 1 |