

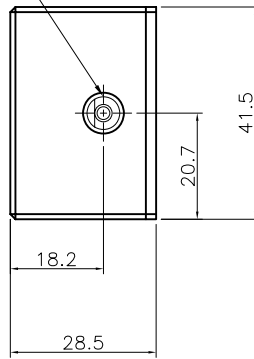


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2014.03.11.

DC POWER JACK(ø5.0/2.0)



LED(RED)-전원(on/off)

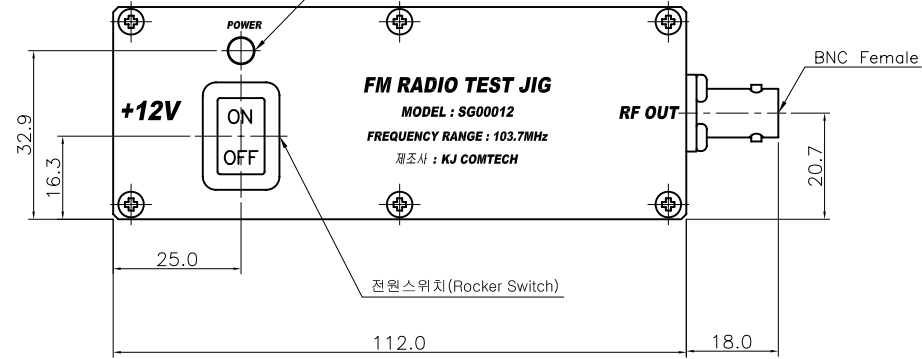



* ELECTRICAL SPECIFICATIONS

PARAMETERS	SPECIFICATION	COMMENT
Operating Frequency	103.7MHz	
Output Level	-50dBm (± 1.5 dBm)	
Impedance	50 Ω	
Supply Voltage	12V	
Operating Current	60mA	MAX.

* E2202 폰을 기준으로 HP8924C 장비로 검사시
AC LEVEL : 89mV + 2% (87.22~90.78mV)
DISTORTION : 1.3% (Max.)

* MECHANICAL SPECIFICATIONS

HOUSING : A6061(White Chromate)
CONNECTORS : MBsBD (SUICO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON
MARKING COLOR : BLACK

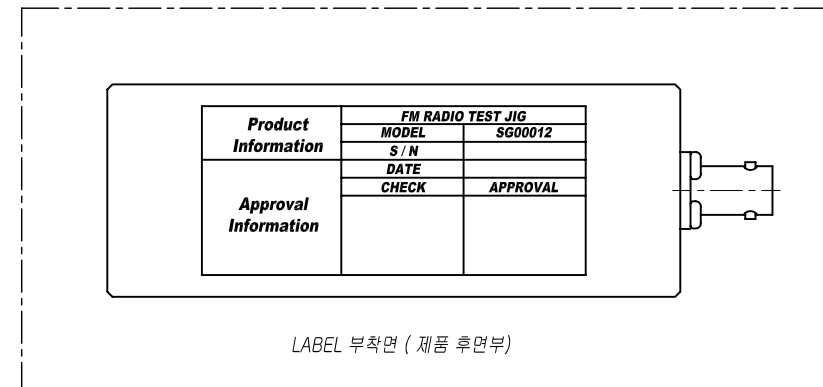

TOLERANCE	Decimal ± 0.3	DATE	2014. 03. 11.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	KJ COMTECH CO.,LTD. TITLE Signal Generator (103.7MHz/-50dBm)
		DRAWN BY	T.J.KIM	
FINISH	White Chromate	SCALE	1/1	UNIT mm
		DWG NO.	SG00012-7/1	
		REVISION	1	SHEET 1 of 1