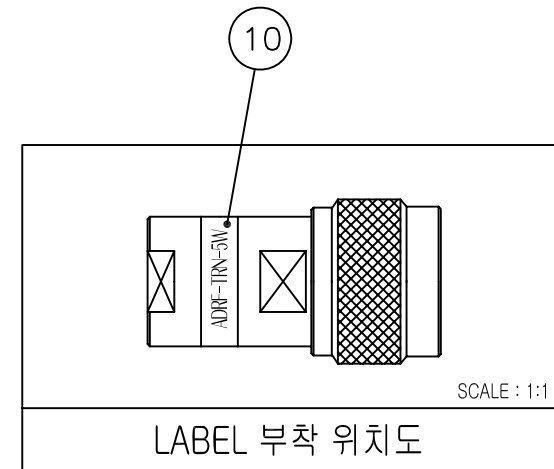
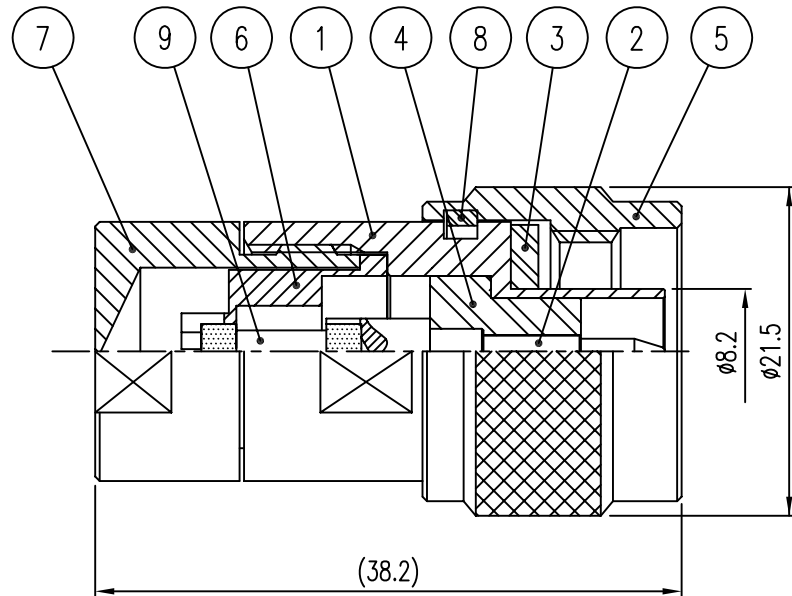


[illegible]

ELECTRICAL DATA

1. IMPEDANCE : 50Ω NOMINAL
2. Frequency range : DC ~ 3GHz
3. V.S.W.R : 1.1 : 1
4. POWER RATING : 5 Watt

1	10	LABEL	1	은색라벨지		DLA00239-8/1
	9	RESISTOR	1	이화 정공(국산)	탄소 피막	DRE00068-N/1 (XA126)
	8	SPRING RING	1	SUS	부동태 처리	DSR00020-5/1 (R8001)
	7	BACK NUT	1	MBsBD	SuCo Plate	DBN00150-5/1
	6	INSERT	1	MBsBD	Silver Plate	DIS00094-5/1 (M8054)
	5	COUPLING CAP	1	MBsBD	SuCo Plate	DCU00061-5/1
	4	INSULATOR	1	TEFLON		DIN00761-N/1 (H8200)
	3	GASKET	1	SILICONE		DGK00013-N/1 (G8001)
	2	CONTACT	1	MBsBD	Silver Plate	DCT00795-5/1 (E8261)
1	BODY	1	MBsBD	SuCo Plate	DBD01009-5/1 (D8209)	

매제 가능재질	품번	품 명		수량	재 질	표면처리	비 고
공통공차 .* ±0.1 .** ±0.05	년월일	2005. 1. 26.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 		
	승인						
재질	검도				도명	N50-P-DUMMY-5W 국산저항	
	제도						
열처리	작성부서 연 구 소				A4	도번	TM00002-7/1
보호피막처리	적도	2/1	단위 mm	총량			