


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.02.18.

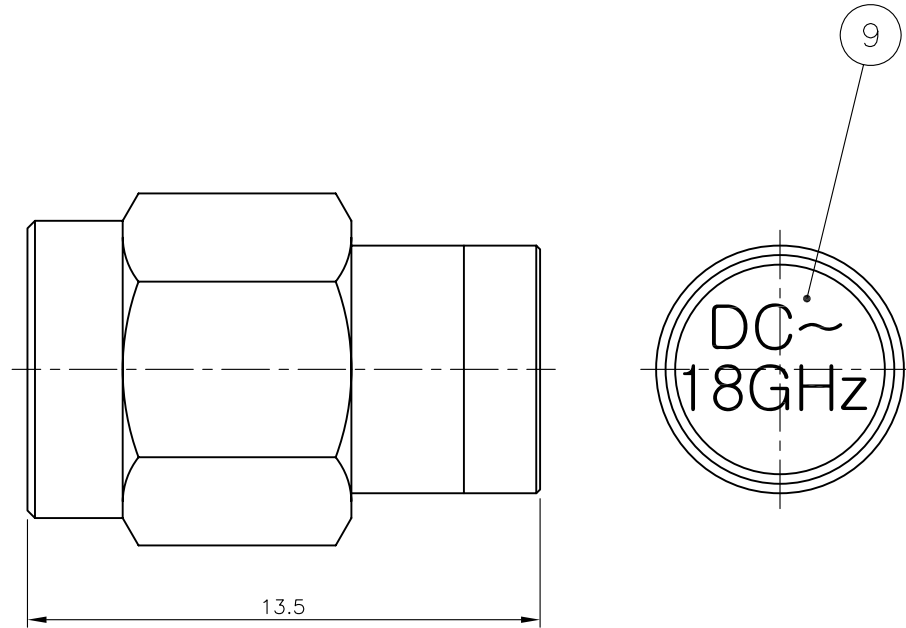

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 18GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.10 : 1 (Max) at 6GHz 1.20 : 1 (Max) at 18GHz
4	POWER	2 Watt

9	LABEL	1			DLA00301-N/1
8	ROD RESISTOR	1			DRE00362-N/1
7	GASKET	1	SILICONE RUB		DGK00004-N/1
6	SPRING RING	1	SUS	Passivated	DSR00002-5/1
5	CAP	1	SUS	Passivated	DCU00006-5/1
4	COVER	1	MBsBD	Gold Plate	DBN00169-5/1
3	INSULATOR	1	TEFLON		DIN01735-N/1
2	CONTACT	1	MBsBD	Gold Plate	DCT02214-5/1
1	BODY	1	MBsBD	Gold Plate	DBD02704-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

주 기

- Coupling Cap 조립전 샘플 검사후 Coupling Cap 조립후 전수검사 진행할것.
- 고주파용으로 전수검사시 저항 및 조립특성에 따라
18GHz까지 특성미달 제품 발생할수 있음.
특성미달 제품은 TM00079-7/6로 적용바람.

TOLERANCE	Decimal ± 0.1	DATE 2010. 02. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	Y.H.CHOI	
MATERIAL		CHECKED BY		TITLE SMA50-P-DUMMY
		DRAWN BY		
FINISH		SCALE	UNIT	DWG NO. TM00079-7/4 REVISION I R SHEET 1 of 1
		5/1	mm	