



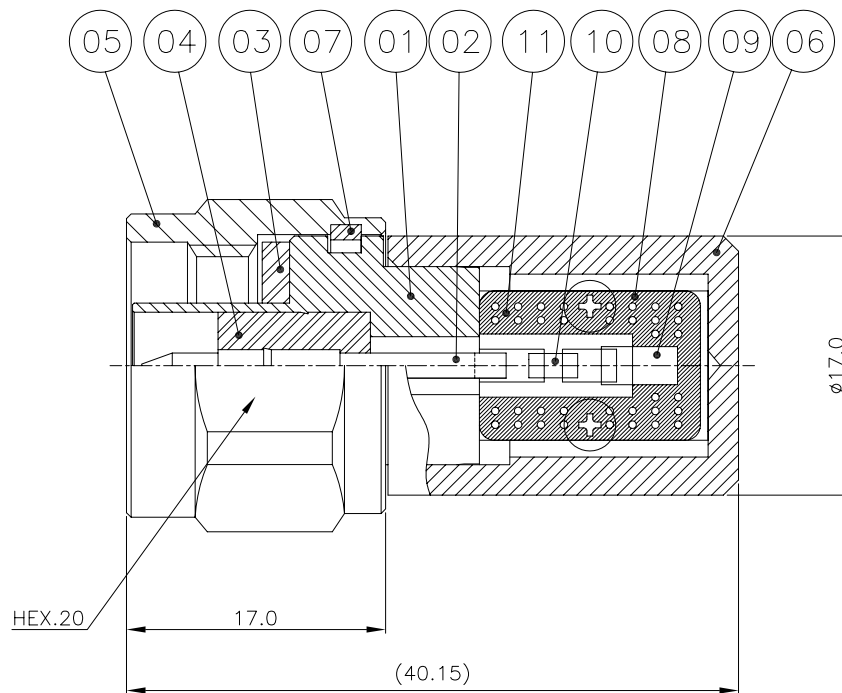

* ELECTRICAL SPECIFICATIONS

1. Frequency Range : 10MHz ~ 3GHz
2. Impedance : 50Ω
3. V.S.W.R (Max.) : 1.2 : 1
4. Voltage Rating : 1000V
5. POWER : 10W

REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.10.07.

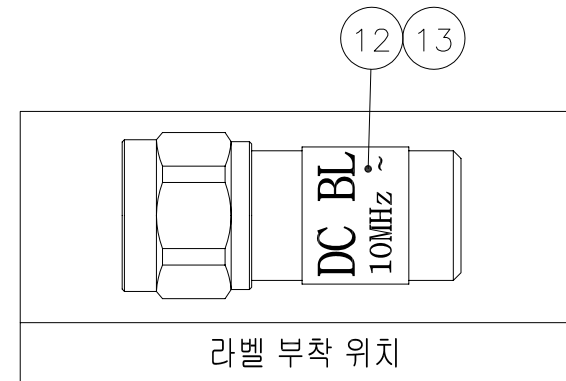

13	BONDING TUBE	1	—	—	ATU00342-N/1 (Ø20-17)
12	LABEL	1	은색데드롱		DLA00283-8/1
11	PCB	1	2.5 31mil 1OZ		DPC00499-9/1
10	CAPACITOR	1	PHYCOMP	3216칩	
9	RESISTOR	1	—	—	DRE00346-N/1
8	BOLT	2	SUS	부동태처리	DBT00198-N/1 (M1.7-4)
7	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1
6	COVER	1	MBsBD	Nickel Plate	DCV00069-5/1
5	CAP	1	MBsBD	Nickel Plate	DCU00063-5/3
4	INSULATOR	1	TEFLON		DIN01670-N/1
3	GASKET	1	SILICONE RUB		DGK00013-N/1
2	CONTACT	1	MBsBD	Gold Plate	DCT02112-5/1
1	BODY	1	MBsBD	Nickel Plate	DBD02609-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2009. 10. 07.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL		CHECKED BY	E.H.KIM	KJ COMTECH CO.,LTD. TITLE N50 DC BLOCK TERM
		DRAWN BY	I.C.KIM	
FINISH		SCALE	2/1	A4 DWG NO. TM00099-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	