


TM00100-7/2




SMA (P) 1W
DC ~ 18 GHz 1.2:1
B:9.2mm
BODY/Nickel PIN/Gold

TM00100-7/2	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
☐ ZND (~8.5GHz)
☒ ZVA50 (~50GHz)
- ☐ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☒ 2.4mm Male to 2.4mm Male
50GHz Cable)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

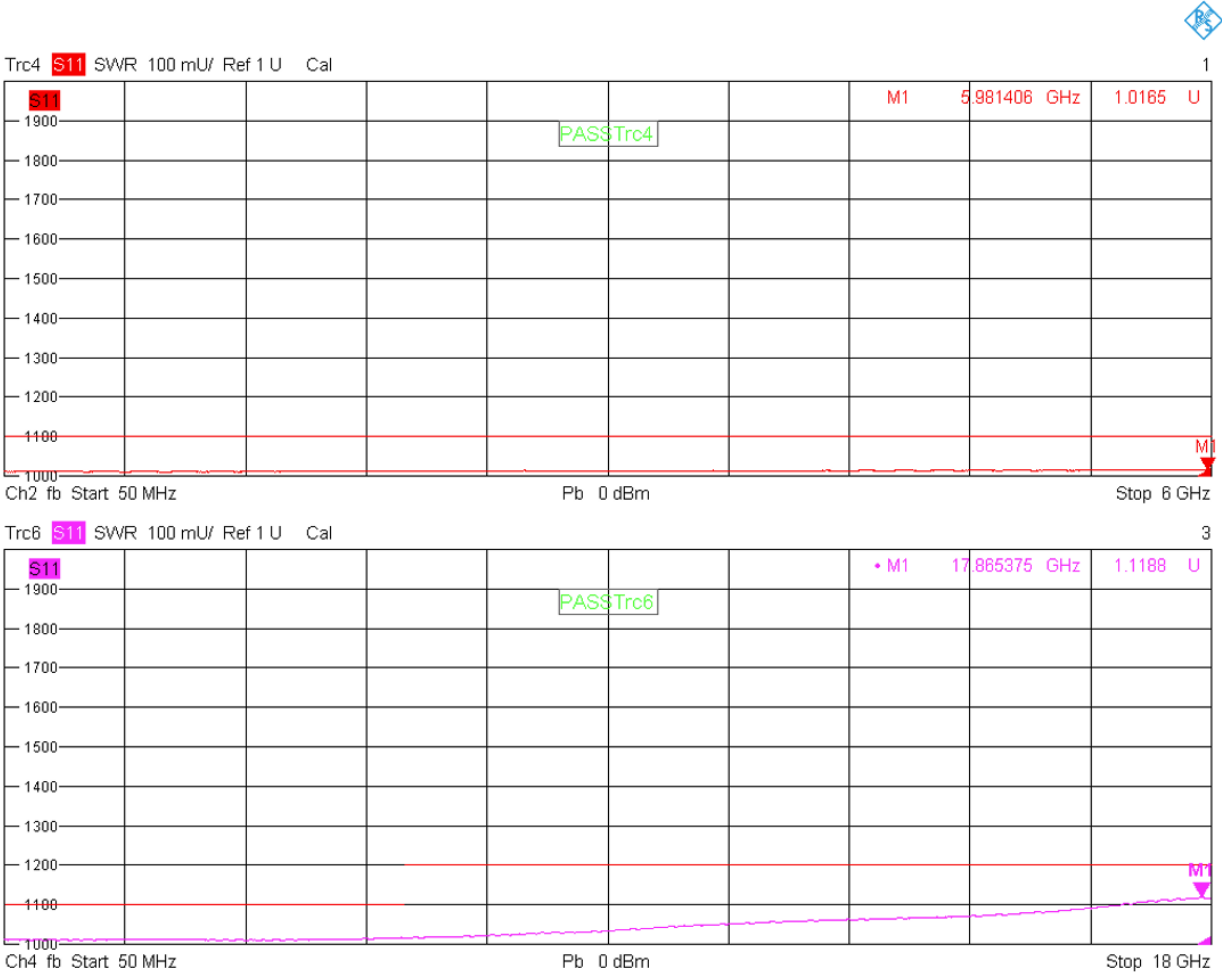

4/4/2022, 6:21 AM