


A

B

C

D

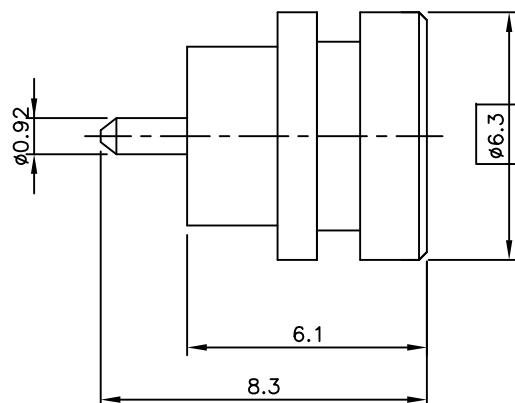


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.07.06.
1				

NOTE :

- Interface : IEC 169-15
MIL-C-39012, SMA
- Material and Finish
Center contact : Gold plated Brass
Body : Passivated Stainless-steel
Insulator : PTFE
- Environmental data
Frequency Range : DC ~ 18GHz
Impedance : 50 Ohms
VSWR :
DC~4GHz : 1.05 Max.
4 ~ 8GHz : 1.10 Max.
8 ~ 12.4GHz : 1.15 Max.
12.4~18GHz : 1.20 Max.
Operating Temperature : -45 ~ 120°C
2011/65/EU (RoHS) : Compliant

5	ROD RESISTOR	1			DRE00362-N/1
4	COVER	1	SUS	Passivated	DBN00168-5/2
3	INSULATOR	1	TEFLON		DIN01732-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02207-5/1
1	BODY	1	SUS	Passivated	DBD02695-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2022. 07. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	S.H.KIM		
MATERIAL	_____	CHECKED BY		TITLE SMA50-P-DUMMY	
FINISH	_____	DRAWN BY	S.Y.EUN		
SCALE 5/1		UNIT mm		A4	DWG NO. TM00100-7/3
				REVISION	I R
				SHEET	1 of 1

A

B

C

D