


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration		Y.H.CHOI	2010.03.22.
1	[설번처리No.201104-0005] 역지끼움 내경부 공차 변경	I.C.KIM	Y.H.CHOI	2011.04.25.

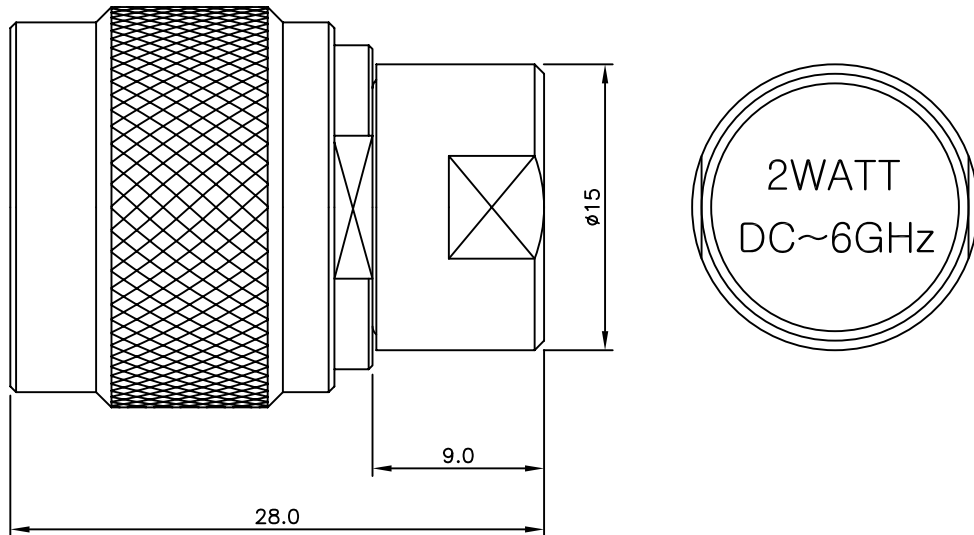

ELECTRICAL SPECIFICATIONS
Frequency Range : DC ~ 6GHz
Impedance : 50 Ω
Power : 2 Watts
V.S.W.R (max) : 1.2 : 1

MECHANICAL SPECIFICATIONS	
IP Class	IP54
Dimensions	∅21 x 28
Operating Temperature	-25 ~ +65°C
Relative Humidly	0 ~ 100%
Connector Finish	Nickel
Heat Sunk	-

13	LABEL	1			DLA00310-N/1
12	ROD RESISTOR	1			DRE00378-N/1
11	O RING	1	SILICONE RUB		DGK00032-N/1
10	GASKET	1	SILICONE RUB		DGK00013-N/1
9	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1
8	CAP	1	MBsBD	Nickel Plate	DCU00059-5/1
7	INSERT(B)	1	MBsBD	Nickel Plate	DIS00170-5/1
6	INSERT(A)	1	MBsBD	Nickel Plate	DIS00164-5/2
5	BACK NUT	1	MBsBD	Nickel Plate	DBN00170-5/1
4	INSULATOR	1	TEFLON		DIN01750-N/1
3	CONTACT(B)	1	MBsBD	Gold Plate	DCT02247-5/2
2	CONTACT(A)	1	MBsBD	Gold Plate	DCT02246-5/2
1	BODY	1	MBsBD	Nickel Plate	DBD02724-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2011. 04. 25.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	Y.H.CHOI	
MATERIAL		CHECKED BY		TITLE N50-P-DUMMY
		DRAWN BY	I.C.KIM	
FINISH		SCALE	UNIT	DWG NO. TM00101-7/1
		2.5/1	mm	
				REVISION 1
		A4		SHEET 1 of 1