

TM00101-7/2


Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

N (P) 2W
DC ~ 15 GHz 1.2:1
6GHz/1.1, 15GHz/1.25
L:28mm
BO/NI PI/GO CAP/BR/NI

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
☐ ZND (~8.5GHz)
☒ ZVA50 (~50GHz)
- ☐ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☒ 2.4mm Male to 2.4mm Male
50GHz Cable)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

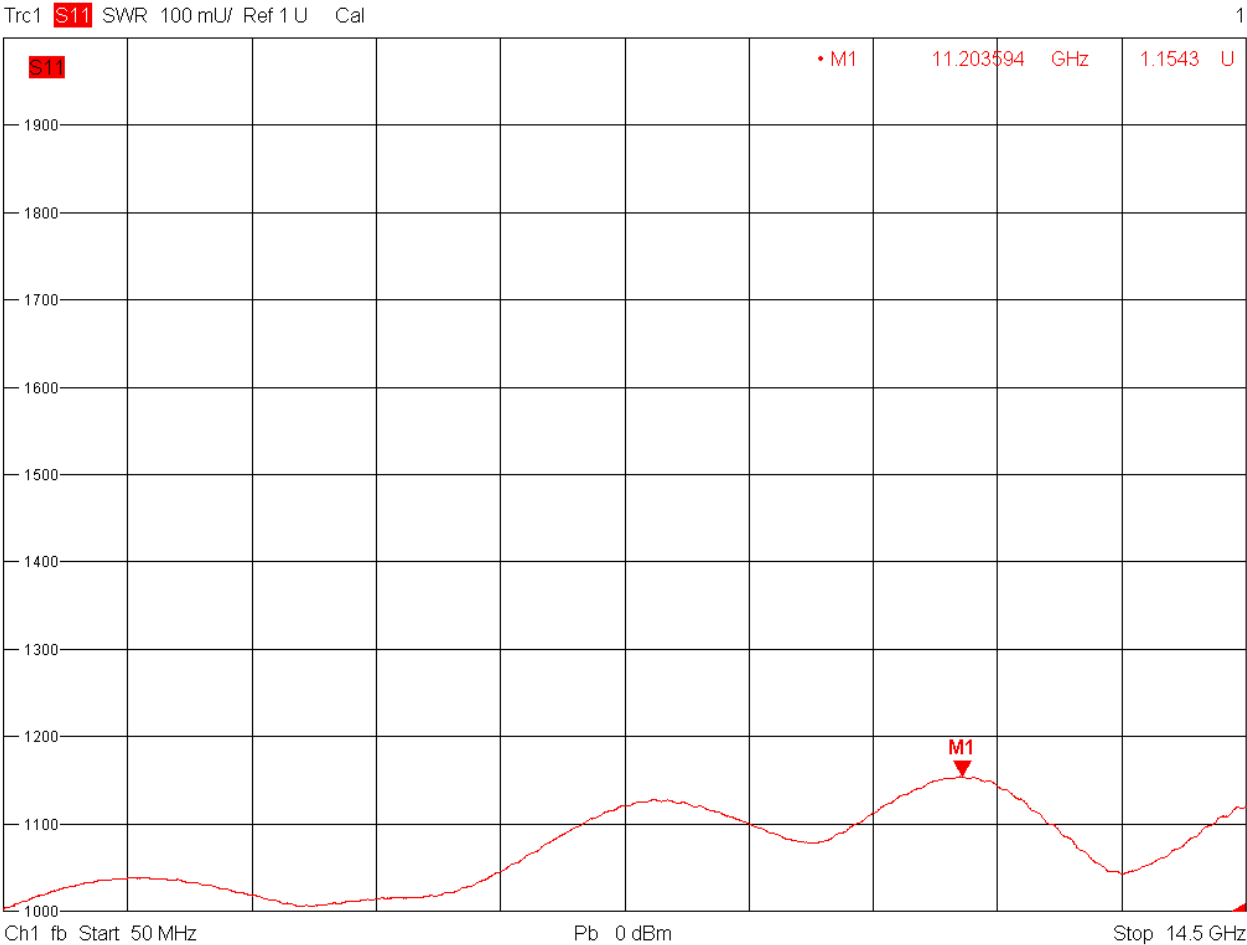

7/7/2022, 1:17 AM