
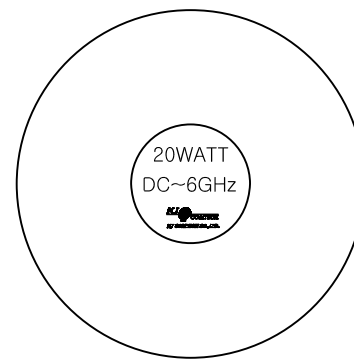


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.04.21.

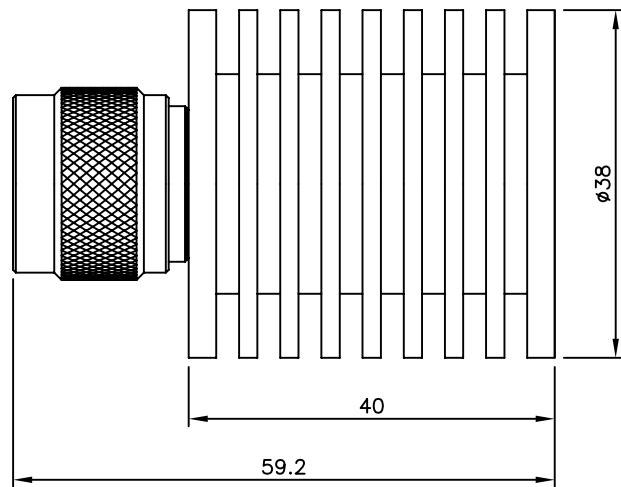

ELECTRICAL SPECIFICATIONS
Frequency Range : DC ~ 6GHz
Impedance : 50 Ω
Power : 20 Watts
V.S.W.R (max) : 1.2 : 1

MECHANICAL SPECIFICATIONS	
IP Class	IP54
Dimensions	ø38 x 59.2
Operating Temperature	-25 ~ +65°C
Relative Humidity	0 ~ 100%
Connector Finish	Nickel
Heat Sunk	Black Anodized Aluminum

12	LABEL	1			DLA00314-N/1
11	ROD RESISTOR	1			DRE00058-N/1
10	O RING	1	SILICONE RUB		DGK00164-N/1
9	GASKET	1	SILICONE RUB		DGK00013-N/1
8	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1
7	HEAT SINK	1	AL6061	Black Anodize	DHS00011-5/1
6	CAP	1	MBsBD	Nickel Plate	DCU00059-5/1
5	INSERT	1	MBsBD	Nickel Plate	DIS00166-5/1
4	BACK NUT	1	MBsBD	Nickel Plate	DBN00172-5/1
3	INSULATOR	1	TEFLON		DIN01770-N/1
2	CONTACT	1	MBsBD	Gold Plate	DCT02265-5/1
1	BODY	1	MBsBD	Nickel Plate	DBD02733-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2010. 04. 21.	
	Angle	APPROVED BY	Y.H.CHOI
MATERIAL		CHECKED BY	
		DRAWN BY	
FINISH		SCALE	UNIT
		1.2/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE			
N50-P-DUMMY(20W)			
A4	DWG NO.	TM00104-7/1	
	REVISION	I R	SHEET 1 of 1