



REVISION			DATE
REV	DESCRIPTION		
1	최초 개점	2010.04.27.	



ELECTRICAL SPECIFICATIONS			
1	FREQUENCY RANGE	DC ~ 4GHz	
2	IMPEDANCE	50Ω NOMINAL	
3	V.S.W.R	1.10 : 1 (Max) at 2GHz 1.20 : 1 (Max) at 4GHz	
4	POWER	30 Watt	

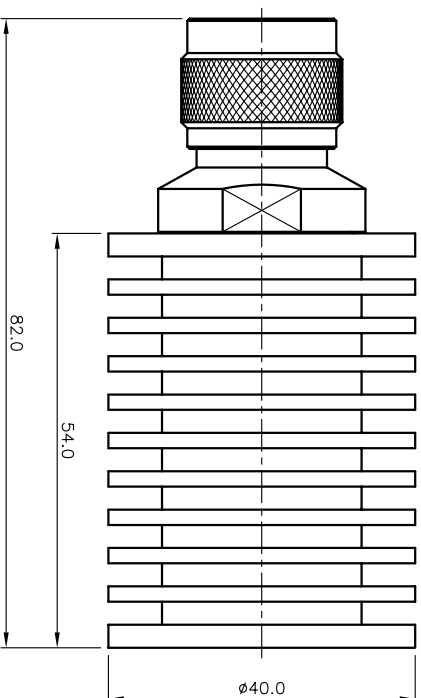

12	LABEL	1			DIA00315-N/1
11	ROD RESISTOR	1			DRE00055-N/1
10	O RING	1	SILICONE RUB		DGK00123-N/1
9	GASKET	1	SILICONE RUB		DGK00013-N/1
8	SPRING RING	1	MSBD	Nickel Plate	DSR00020-5/1
7	HEAT SINK	1	AL6061	Black Anodize	DHS00012-5/1
6	CAP	1	MSBD	Nickel Plate	DCU00059-5/1
5	INSERT	1	MSBD	Nickel Plate	DIS00167-5/1
4	BACK NUT	1	MSBD	Nickel Plate	DBN00173-5/1
3	INSULATOR	1	TEFLON		DIN01773-N/1
2	CONTACT	1	MSBD	Gold Plate	DCT02267-5/1
1	BODY	1	MSBD	Nickel Plate	DBD02736-5/1
NO.	DESCRIPTION	QTY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	±0.1
	Angle	±1°
APPROVED BY Y.H.CHOI		
CHECKED BY		
DRAWN BY		
FINISH	SCALE 1.5/1	UNIT mm
DWG. NO. TM00106-7/1		
REVISION 1 R		
SHEET 1 of 1		

KJ COMTECH
RF & MICROWAVE TECHNOLOGY
Tel : 82-29-347-8015
Fax : 82-29-347-8017

N50-P-DUMMY(30W)