



REVISION			DATE
REV	DESCRIPTION		
1	최초 개점	2010.04.27.	

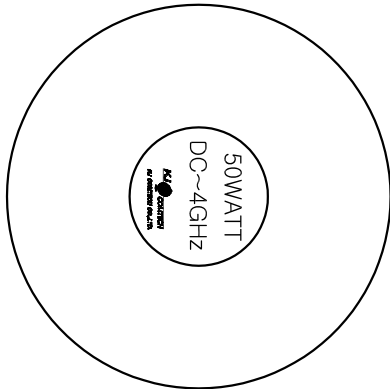

ELECTRICAL SPECIFICATIONS			
1	FREQUENCY RANGE	DC ~ 4GHz	
2	IMPEDANCE	50Ω NOMINAL	
3	V.S.W.R	1.10 : 1 (Max) at 2GHz 1.20 : 1 (Max) at 4GHz	
4	POWER	50 Watt	

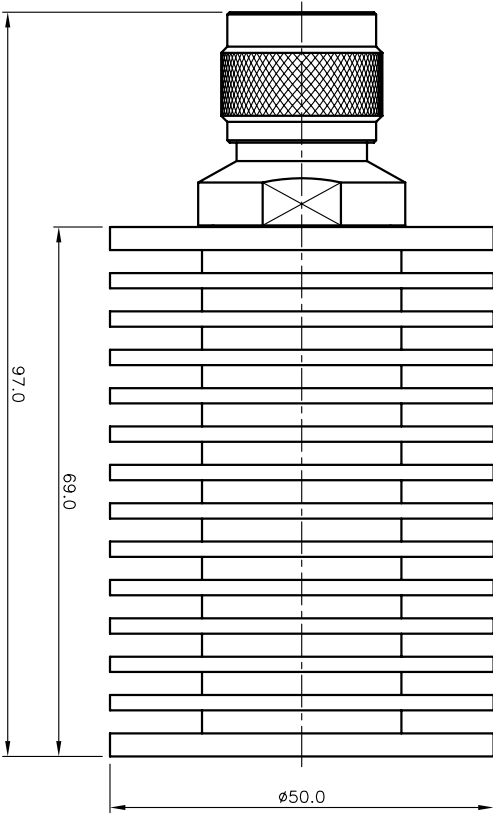

12	LABEL	1		DLA00316-N/1
11	ROD RESISTOR	1		DRE00055-N/1
10	O RING	1	SILICONE RUB	DGK00123-N/1
9	GASKET	1	SILICONE RUB	DGK00013-N/1
8	SPRING RING	1	MSBD	DSR00020-5/1
7	HEAT SINK	1	AL6061	DHS00013-5/1
6	CAP	1	MSBD	DCU00059-5/1
5	INSERT	1	MSBD	DIS00167-5/1
4	BACK NUT	1	MSBD	DBN00173-5/1
3	INSULATOR	1	TEFLON	DIN01773-N/1
2	CONTACT	1	MSBD	DCT02267-5/1
1	BODY	1	MSBD	DBD02736-5/1

NO.	DESCRIPTION	QTY	MATERIAL	PLATING	CODE
DATE	2010. 04. 27.				
APPROVED BY Y.H. CHOI					
CHECKED BY					
DRAWN BY					
TOLERANCE		Decimal	±0.1		
		Angle	±1°		
MATERIAL					
FINISH					

KUTEC
RF & MICROWAVE
TECHNOLOGY
Tel : 82-29-347-8015
Fax : 82-29-347-8017

KUTEC CO., LTD.

N50-P-DUMMY(50W)

SCALE	UNIT	DWG. NO.	REVISION	SHEET
1.5/1	mm	TM00107-7/1	1 R	1 of 1