

1

2



3

4

5

6

REVISION			DATE
REV	DESCRIPTION		
1	최초 개정	2010.05.03.	

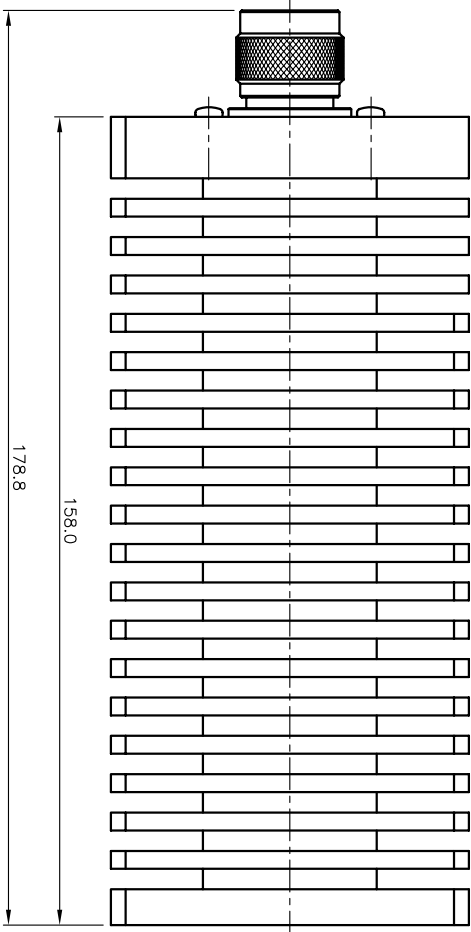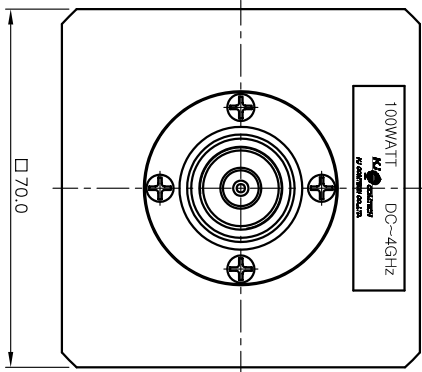

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 4GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.10 : 1 (Max) at 2GHz 1.20 : 1 (Max) at 4GHz
4	POWER	100 Watt

13	LABEL	1		DJA00318-N/1
12	통근머리 BOLT	1	SUS303	Passivated DBT00442-N/1
11	ROD RESISTOR	1		DRE00318-N/1
10	GASKET	1	SILICONE RUB	DGK00013-N/1
9	SPRING RING	1	MSBD	DSR000020-5/1
8	HEAT SINK	1	AL6061	Black Anodize DHS0014-5/1
7	CAP	1	MSBD	Nickel Plate DCU000059-5/1
6	INSERT	1	MSBD	Nickel Plate DIS00168-5/1
5	COVER	1	MSBD	Nickel Plate DCV00070-5/1
4	INSULATOR	1	TEFLON	DIN01777-N/1
3	CONTACT	1	MSBD	Gold Plate DCT02274-5/1
2	CONTACT	1	MSBD	Gold Plate DCT02270-5/1
1	BODY	1	MSBD	Nickel Plate DBD02740-5/1

TOLERANCE		Decimal	±0.1
ANGLE		Angle	±1°
MATERIAL		CHECKED BY	
FINISH		DRAWN BY	
SCALE		UNIT	mm
1/1			
A3		DWG. NO.	TM00108-7/1
		REVISION	1 R
		SHEET	1 of 1
		TITLE	
		N50-P-DUMMY(100W)	
		KJ COMTECH CO., LTD.	
		RF & MICROWAVE TECHNOLOGY	
		Tel : 82-29-347-8015	
		Fax : 82-29-347-8017	