
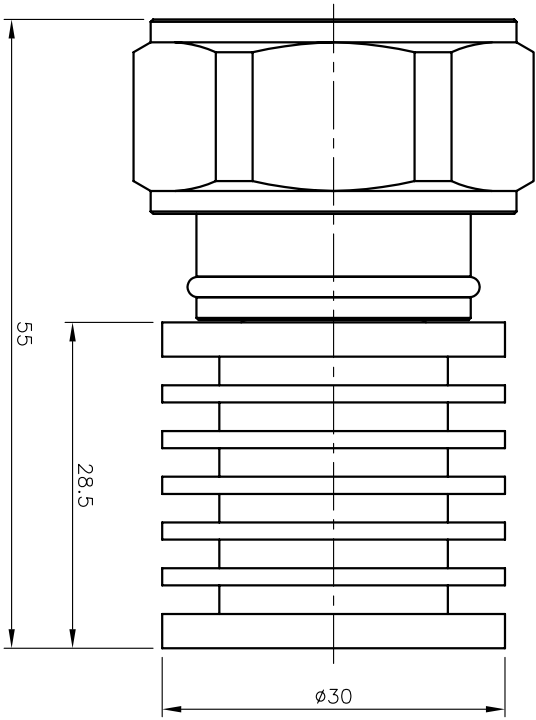


REVISION		
REV	DESCRIPTION	DATE
1R	Initial Registration	2010.09.27.

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 3GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.10 : 1 (Max) at 2GHz 1.20 : 1 (Max) at 3GHz
4	POWER	10 Watt



13	LABEL	1			DLA00352-N/1
12	ROD RESISTOR	1			DRE00058-N/1
11	O RING	1	SILICONE RUB		DGK00164-N/1
10	O RING	1	SILICONE RUB		DGK00191-N/1
9	O RING	1	SILICONE RUB		DGK00054-N/1
8	HEAT SINK	1	AL6061	Black Anodize	DHS00010-5/1
7	INSERT	1	MBSBD	Nickel Plate	DIS00166-5/1
6	BACK NUT	1	MBSBD	Nickel Plate	DBN00172-5/1
5	CAP	1	MBSBD	SUCO Plate	DCU00078-5/1
4	INSULATOR	1	TEFLON		DIN01813-N/1
3	CONTACT(B)	1	MBSBD	Gold Plate	DCT02343-5/1
2	CONTACT(A)	1	MBSBD	Gold Plate	DCT02306-5/1
1	BODY	1	MBSBD	SUCO Plate	DBD02826-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

DATE 2010. 09. 27.

Decimal
±0.1
TOLERANCE
Angle
±1°

MATERIAL

FINISH

CHECKED BY
DRAWN BY

SCALE 1.5/1
UNIT mm

KU CONTECH
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE 7/16 DIN50-P-DUMMY
DWG NO. TM00113-7/1
REVISION 1 R
SHEET 1 of 1