
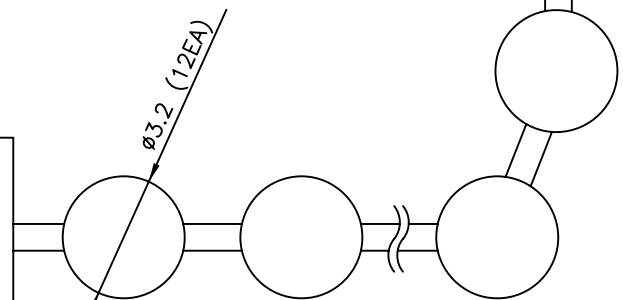
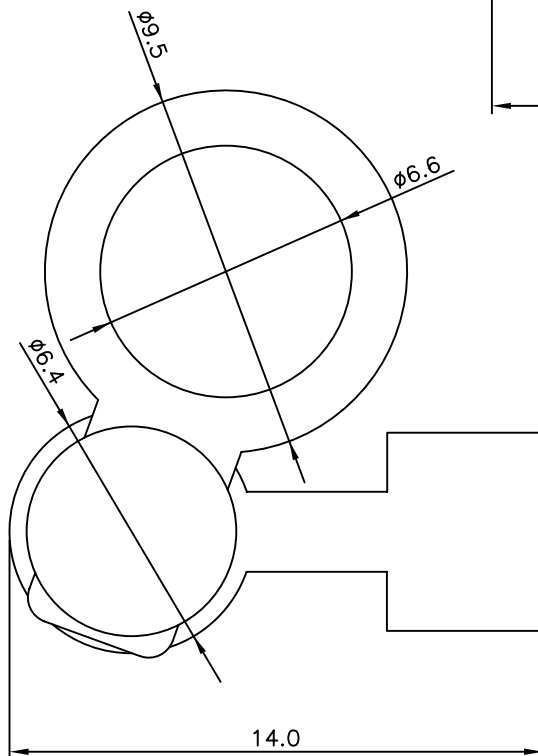
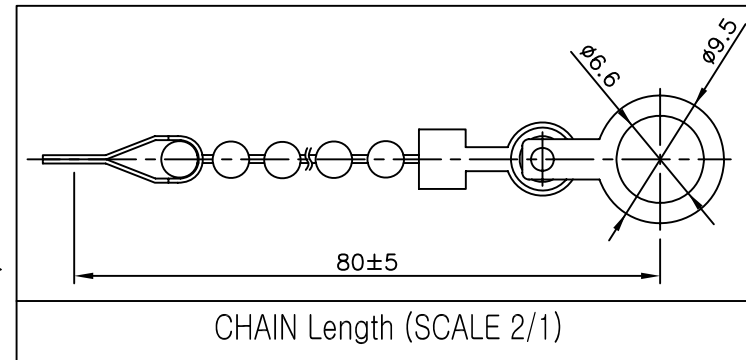
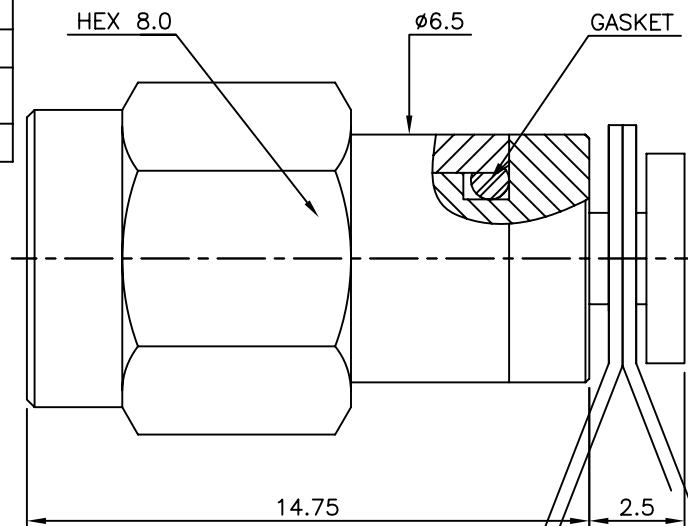


ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 18GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.15 : 1 (Max) at 6GHz 1.25 : 1 (Max) at 18GHz
4	POWER	2 Watt

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.11.22.



14	CHAIN	1	BsS	Gold Plate	DCH00008-5/2
13	RIVET	1	MBsBD C3604BD-F	Gold Plate	DRV00013-5/2
12	RIVET	1	MBsBD C3604BD-F	Gold Plate	DRV00002-5/3
11	ROD RESISTOR	1			DRE00362-N/1
10	GASKET	1	SILICONE RUB		DGK00275-N/1
9	GASKET	1	SILICONE RUB		DGK00004-N/1
8	SPRING RING	1	SUS	Passivated	DSR00002-5/1
7	TERMINAL RING	2	BsS	Gold Plate	DTE00001-5/2
6	WASHER	1	BsS	Gold Plate	DWA00004-5/1
5	CAP	1	SUS	Passivated	DCU00006-5/1
4	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00204-5/2
3	INSULATOR	1	TEFLON		DIN01735-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02214-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD03738-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 11. 22.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMA50-P-DUMMY CHAIN
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. TM00122-7/5
		5/1	mm	
				REVISION I R
				SHEET 1 of 1