


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	I.C.KIM	2012.11.30.

5/8-24 UNEF-2A

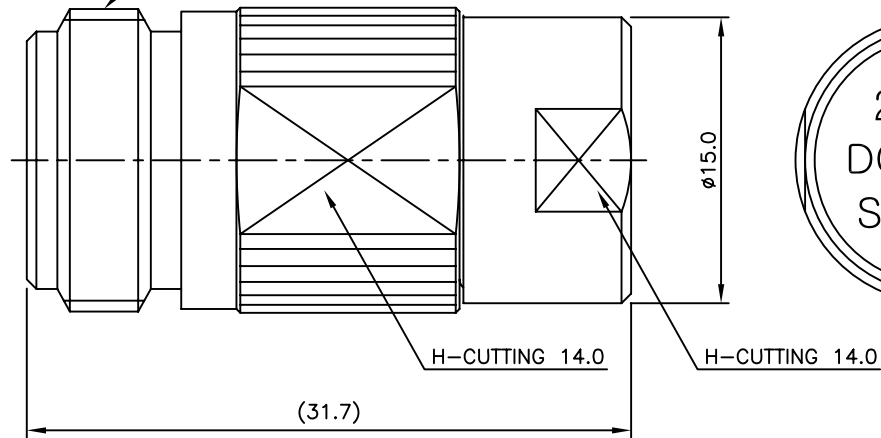

ELECTRICAL SPECIFICATIONS
Frequency Range : DC ~ 6GHz
Impedance : 50 Ω
Power : 2 Watts
V.S.W.R (max) : 1.2 : 1

MECHANICAL SPECIFICATIONS	
IP Class	IP54
Dimensions	$\phi 15 \times 31.7$
Operating Temperature	-25 ~ +65°C
Relative Humidly	0 ~ 100%
Connector Finish	Nickel
Heat Sunk	-

10	LABEL	1			DLA00476-8/1
9	ROD RESISTOR	1			DRE00378-N/1
8	O RING	1	SILICONE RUB		DGK00032-N/1
7	INSERT(B)	1	MBsBD	Nickel Plate	DIS00170-5/1
6	INSERT(A)	1	MBsBD	Nickel Plate	DIS00164-5/2
5	BACK NUT	1	MBsBD	Nickel Plate	DBN00170-5/1
4	INSULATOR	1	TEFLON		DIN01750-N/1
3	CONTACT(B)	1	MBsBD	Gold Plate	DCT02247-5/2
2	CONTACT(A)	1	MBsBD	Gold Plate	DCT02587-5/1
1	BODY	1	MBsBD	Nickel Plate	DBD03049-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 11. 30.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL		CHECKED BY	
		DRAWN BY	E.H.KIM
FINISH		SCALE	UNIT
		2.5/1	mm



TITLE		N50-J-DUMMY	
DWG NO.	TM00128-7/2		
REVISION	IR	SHEET	1 of 1