



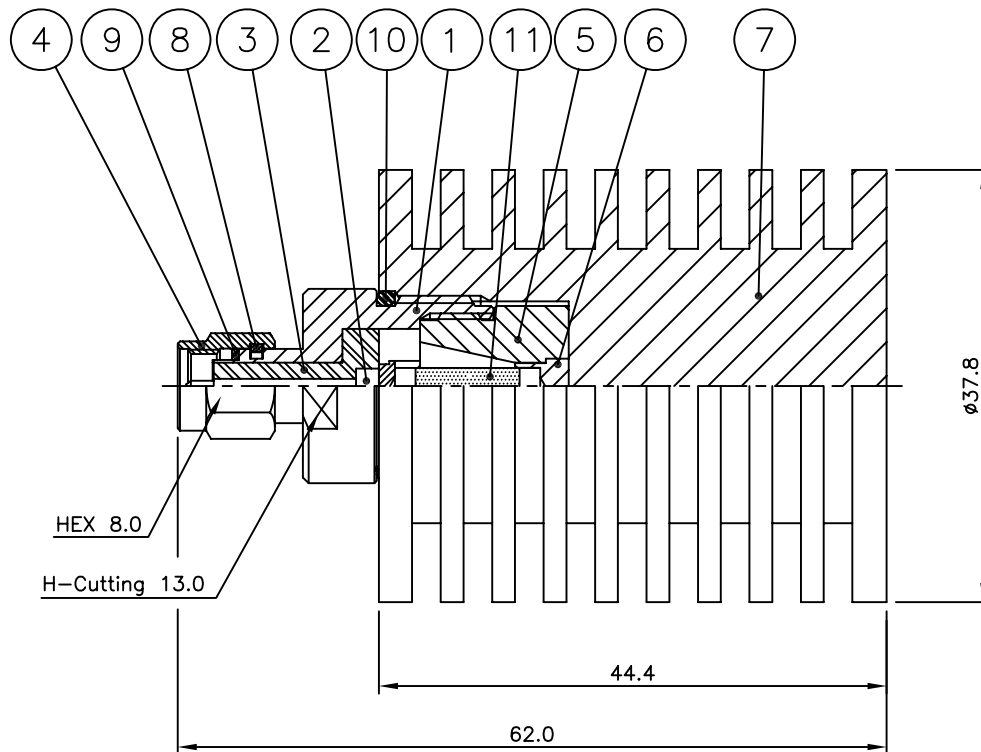

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM		2015.11.19.

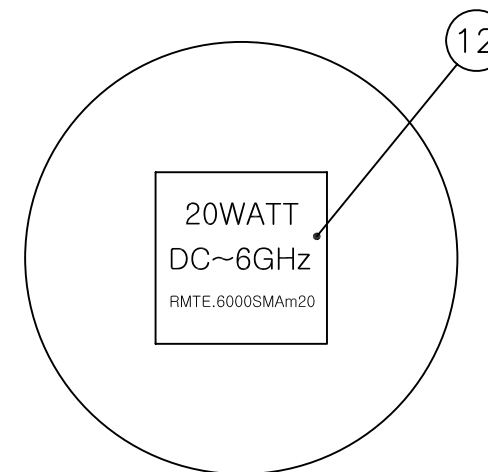

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 6GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.25 : 1 (Max) at 6GHz
4	POWER	20 Watts @ 25°
5	Operating Temp Range	-40° to 125° C

MECHANICAL SPECIFICATIONS		
1	Connector	Nickel Plated Brass
2	HEATSINK	Black Anodized Aluminium
3	Center Conductor	Gold Plated Brass

12	LABEL	1	—		DLA00673-8/1
11	ROD RESISTOR	1			DRE00058-N/1
10	O RING	1	SILICONE RUB		DGK00164-N/1
9	GASKET	1	SILICONE RUB		DGK00004-N/1
8	SPRING RING	1	SUS303	Passivated	DSR00002-5/1
7	HEAT SINK	1	AL6061	Black Anodize	DHS00023-5/1
6	INSERT	1	MBsBD C3604BD-F	Nickel Plate	DIS00166-5/1
5	BACK NUT	1	MBsBD C3604BD-F	Nickel Plate	DBN00172-5/1
4	CAP	1	SUS303	Passivated	DCU00006-5/1
3	INSULATOR	1	TEFLON		DIN02691-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03598-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04075-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2015. 11. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL	—	CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50-PS Termination 20W
	—	DRAWN BY	I.C.KIM	
FINISH	—	SCALE	UNIT	A4 DWG NO. TM00155-7/1 REVISION I R SHEET 1 of 1
	—	1.5/1	mm	