
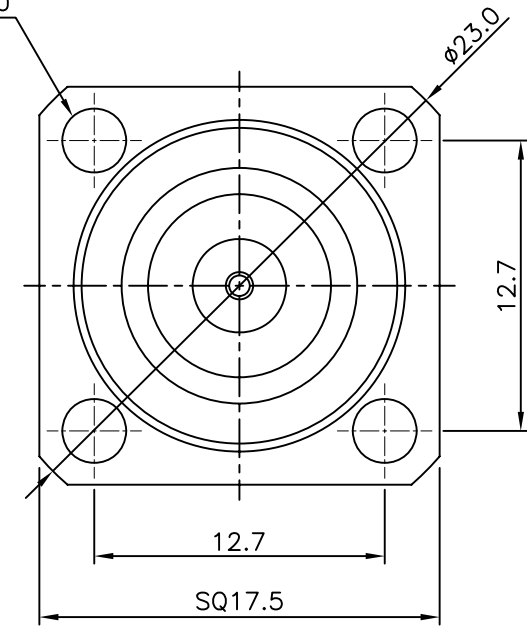


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2016.03.09.
1	[설번No.201603-0006] GASKET 변경 (DGK00194->DGK00032)	H.J.LEE	I.C.KIM	2016.03.16.

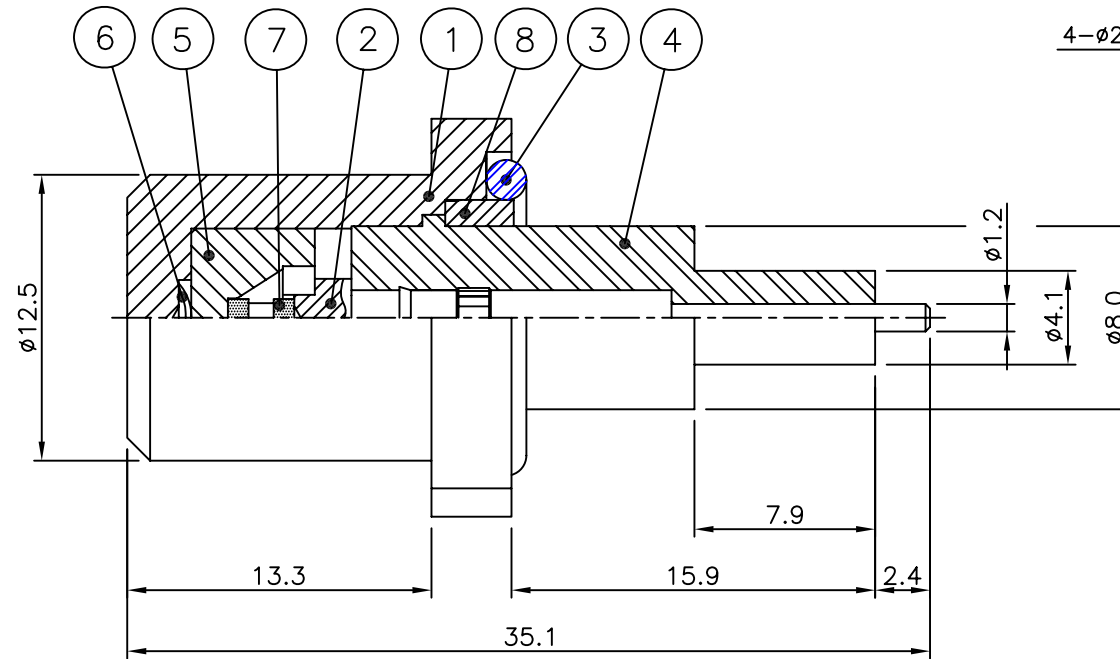

* ELECTRICAL SPECIFICATIONS

Frequency Range : DC ~ 3GHz

Impedance : 50Ω

Power : 1W

* 조립 주기

- ④ INSULATOR에 ② CONTACT를 조립 한다.
- 위 조립품에 ⑦ RESISTOR 를 삽입한다
- ① BODY에 ⑥ SPRING WAHER 와 ⑤ INSERT를 삽입한다
- 3번 항목 과 1번 항목을 조립한다
- 조립된 ① BODY에 ⑧ 번 고정 RING으로 고정 시킨다.
- ③ GASKET을 조립한다.
- 멀티 미터기로 순수 저항 값을 확인 한다.
(47~53 Ω)

8	고정 RING	1	MBsBD C3604BD-F	SUCO Plate	DCV00088-5/1
7	RESISTOR	1			DRE00057-N/1
6	SPRING WASHER	1	BeCu C17300	Silver Plate (3μm)	DWA00093-5/1
5	INSERT	1	MBsBD C3604BD-F	SUCO Plate	DIS00198-5/2
4	INSULATOR	1	TEFLON		DIN02734-N/1
3	GASKET	1	SILICONE RUB		DGK00032-N/1 DGK00194-N/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3μm)	DCT03659-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DBD04126-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2016. 03. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE ENTRY50 FEEDTHRU 1W
		DRAWN BY	H.J.LEE	
FINISH	-	SCALE	3/1	DWG NO. TM00157-7/2 REVISION 1 SHEET 1 of 1
		UNIT	mm	