


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2020. 04. 16.

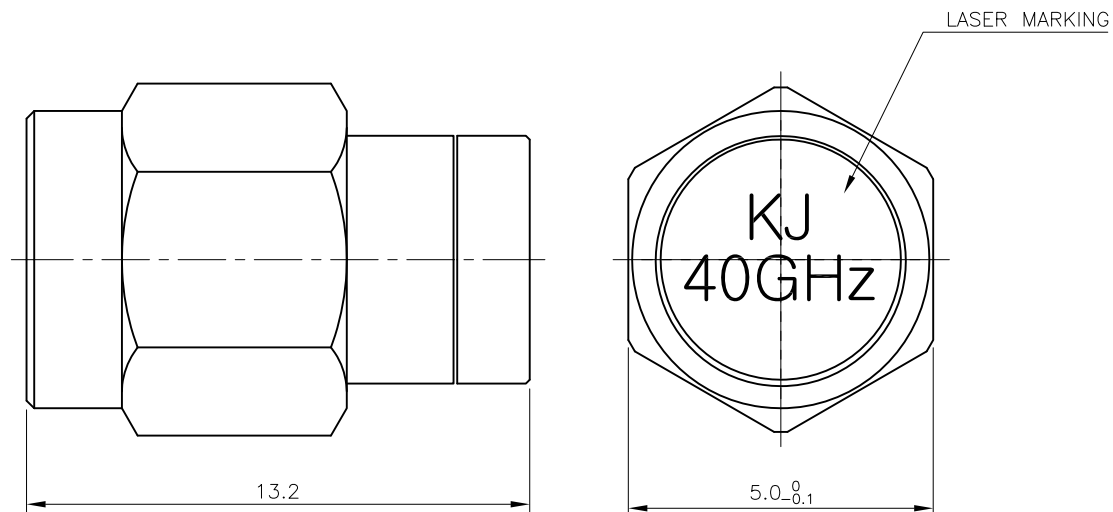

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 40GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.20 : 1 (Max)
4	POWER	1 Watt

9	ROD RESISTOR	1			DRE00362-N/1
8	GASKET	1	SILICONE RUB		DGK00004-N/1
7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	CAP	1	SUS	Passivated	DCU00006-5/1
5	COVER	1	SUS	Passivated	DBN00214-5/4
4	INSULATOR	1	PEEK		DIN02942-N/I
3	INSERT	1	SUS	Passivated	DIS00281-5/5
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03985-5/1
1	BODY	1	SUS	Passivated	DBD04455-5/7
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

주 기

1. Coupling Cap 조립전 샘플 검사후 Coupling Cap 조립후 전수검사 진행할것.

TOLERANCE	Decimal ±0.1	DATE 2020. 04. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	_____	CHECKED BY	_____	TITLE 2.92mm-P-DUMMY
	_____	DRAWN BY	S.L.SON	
FINISH	_____	SCALE	5/1	DWG NO. TM00196-7/1
		UNIT	mm	REVISION 1 SHEET 1 of 1

