


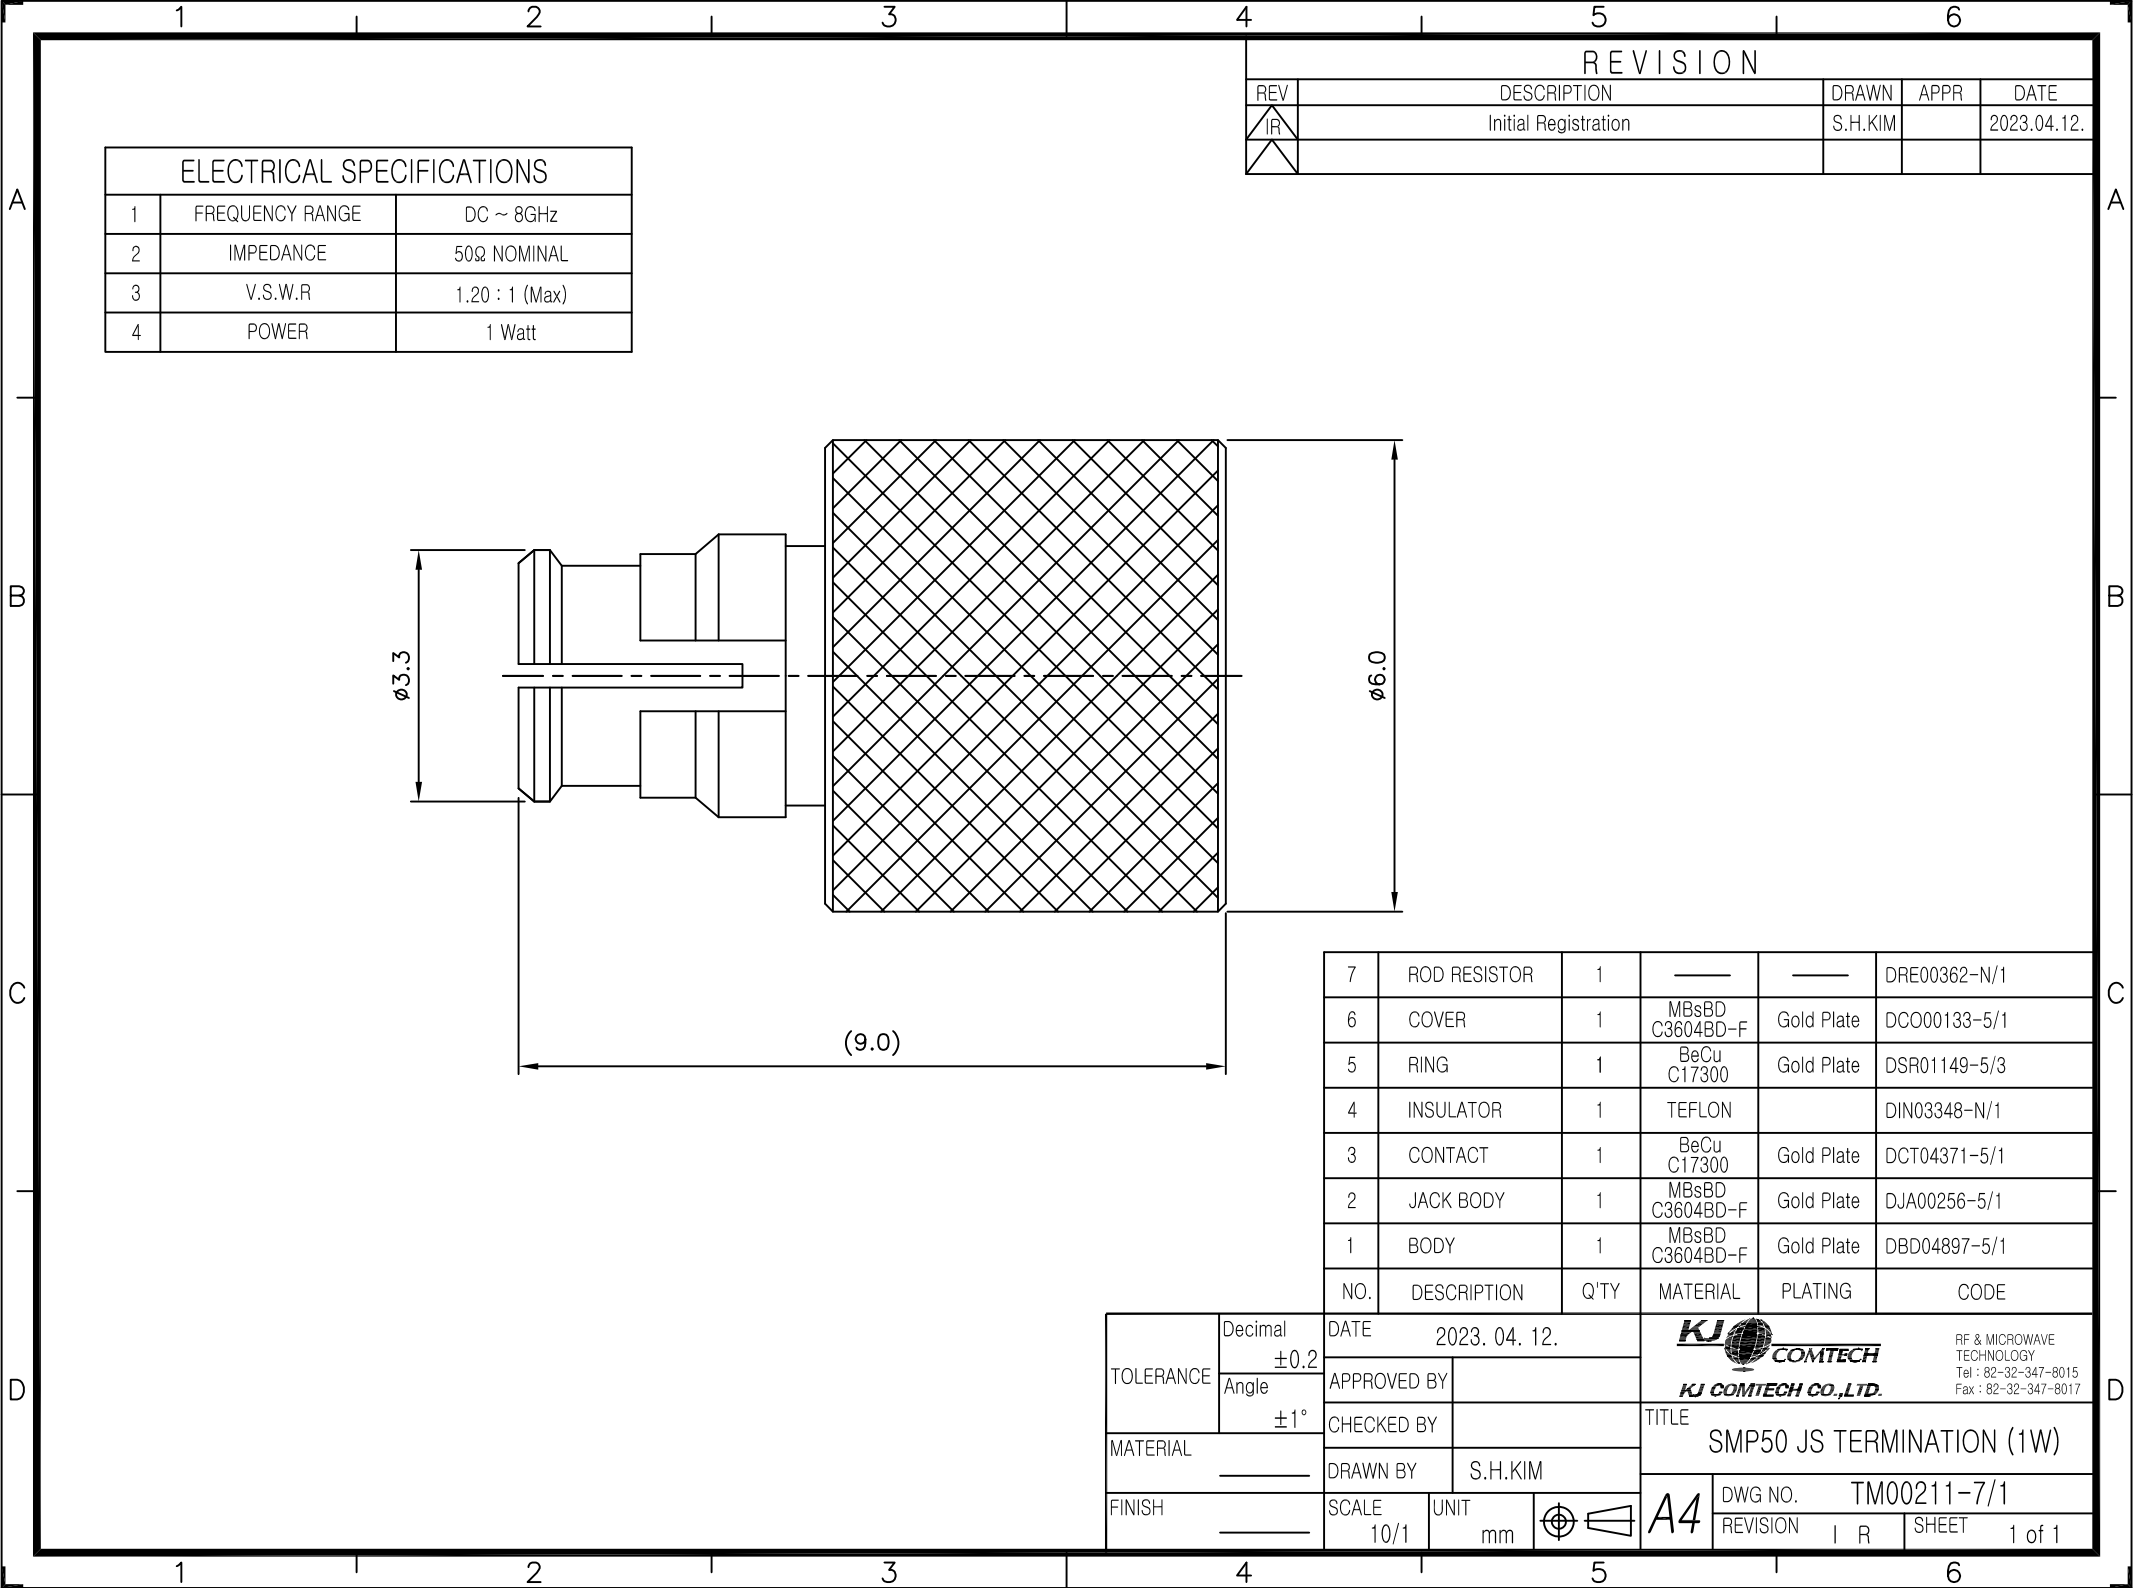

ELECTRICAL SPECIFICATIONS		
1	FREQUENCY RANGE	DC ~ 8GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.20 : 1 (Max)
4	POWER	1 Watt

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.04.12.

7	ROD RESISTOR	1	—	—	DRE00362-N/1
6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00133-5/1
5	RING	1	BeCu C17300	Gold Plate	DSR01149-5/3
4	INSULATOR	1	TEFLON		DIN03348-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT04371-5/1
2	JACK BODY	1	MBsBD C3604BD-F	Gold Plate	DJA00256-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04897-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 04. 12.			 COMTECH KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY					
MATERIAL _____	CHECKED BY			TITLE SMP50 JS TERMINATION (1W)			
	DRAWN BY S.H.KIM						
FINISH _____	SCALE 10/1	UNIT mm		A4	DWG NO. TM00211-7/1		
					REVISION	I R	SHEET 1 of 1