
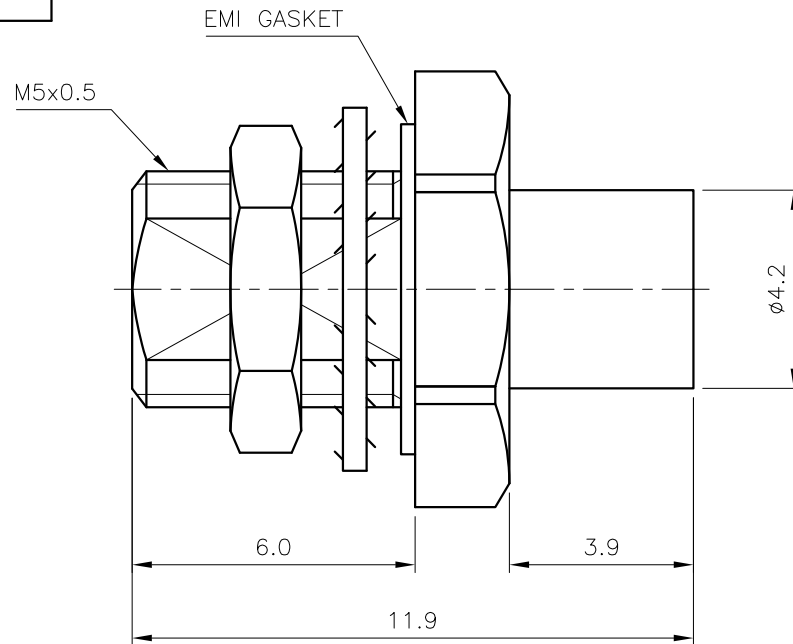



■ 측정 아답터 : AD00716-7/3

ELECTRICAL SPECIFICATIONS

1	FREQUENCY RANGE	DC ~ 8GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.20 : 1 (Max)
4	POWER	1 Watt

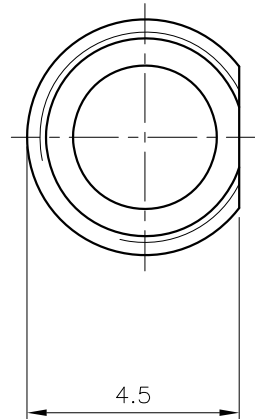

SMP50 Female
Smooth bore

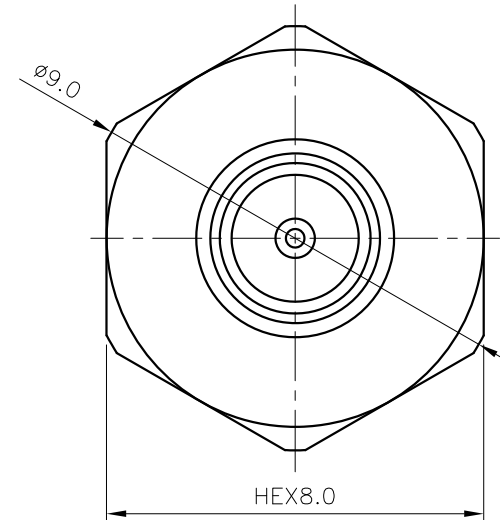

8	ROD RESISTOR	1	—	—	DRE00362-N/1
7	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00133-5/1
6	EMI GASKET	1	Carbon	BLACK	DGK00354-N/1
5	WASHER	1	MBsBD C3604BD-F	Gold Plate	DWA00008-5/1
4	NUT	1	MBsBD C3604BD-F	Gold Plate	DNT00002-5/1
3	INSULATOR	1	TEFLON		DIN03351-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04374-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04900-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 04. 13.			 COMTECH KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY					
MATERIAL _____		CHECKED BY			TITLE SMP50 PB TERMINATION (1W)		
		DRAWN BY S.H.KIM					
FINISH _____		SCALE 6/1	UNIT mm		A4	DWG NO. TM00212-7/1	
						REVISION	I R