
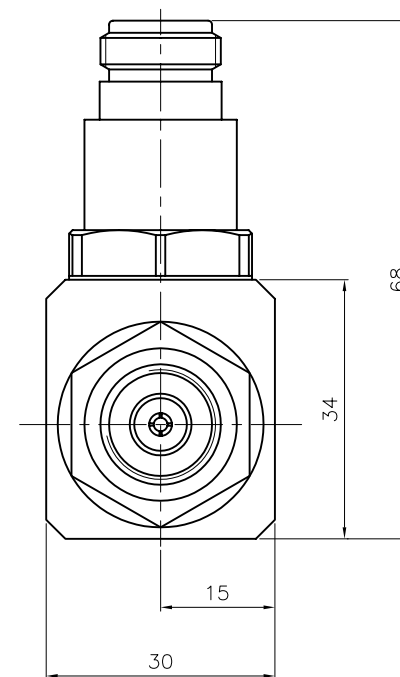


REVISION		
REV	DESCRIPTION	DATE
△		
△		

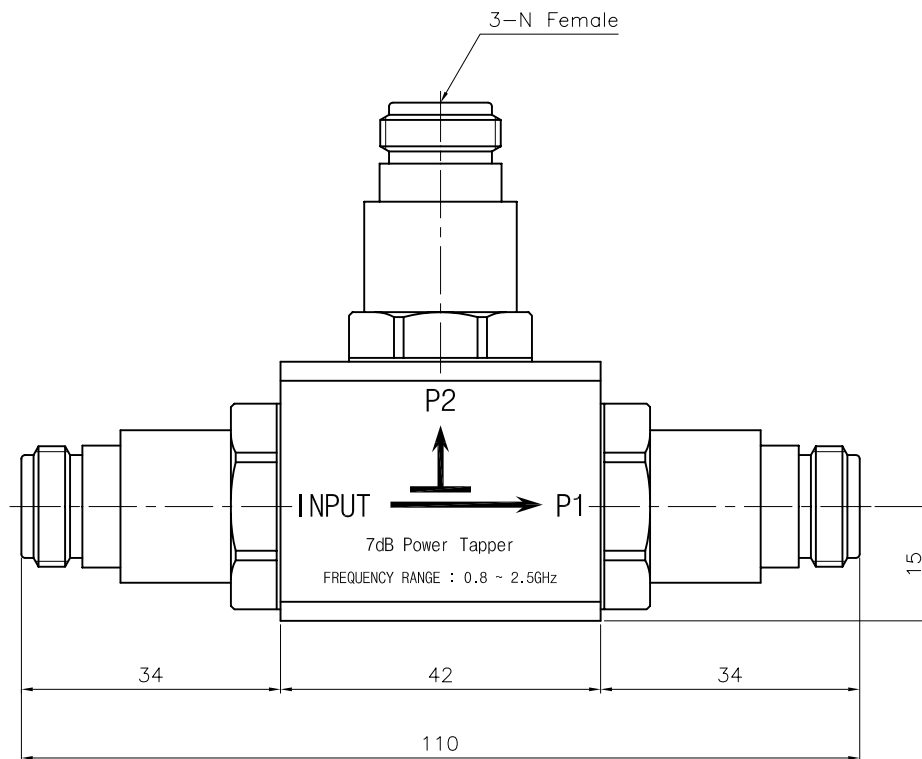

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800.0 ~ 2500.0MHz
 Tap Loss (Input <=> P2) : 7.0±0.6dB
 Insertion Loss (Input <=> P1): 1.6dB(Max)
 Input V.S.W.R (Max.) : 1.5 : 1
 PIM (@43.0dBm 2Tone) : -150.0dBc
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : MBsBD (SUCO Plate)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			2007. 5. 3.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.5	APPROVED BY		J.H.YOUN						
	Angle	CHECKED BY			M.H.LEE		TITLE 7dB POWER TAPPER			
	± 1°	DRAWN BY		K.I.CHO						
MATERIAL		MBsBD			A4					
FINISH		SUCO Plate								
SCALE		1/1		UNIT	mm	DWG NO.		TP00001-7/1		
						SHEET		1 OF 1		