
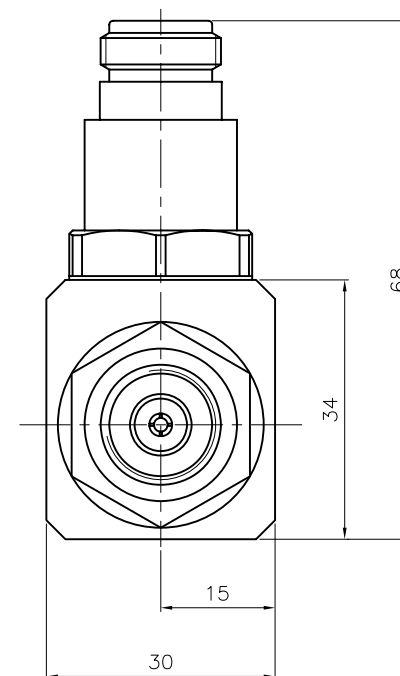


REVISION		
REV	DESCRIPTION	DATE
△		
△		

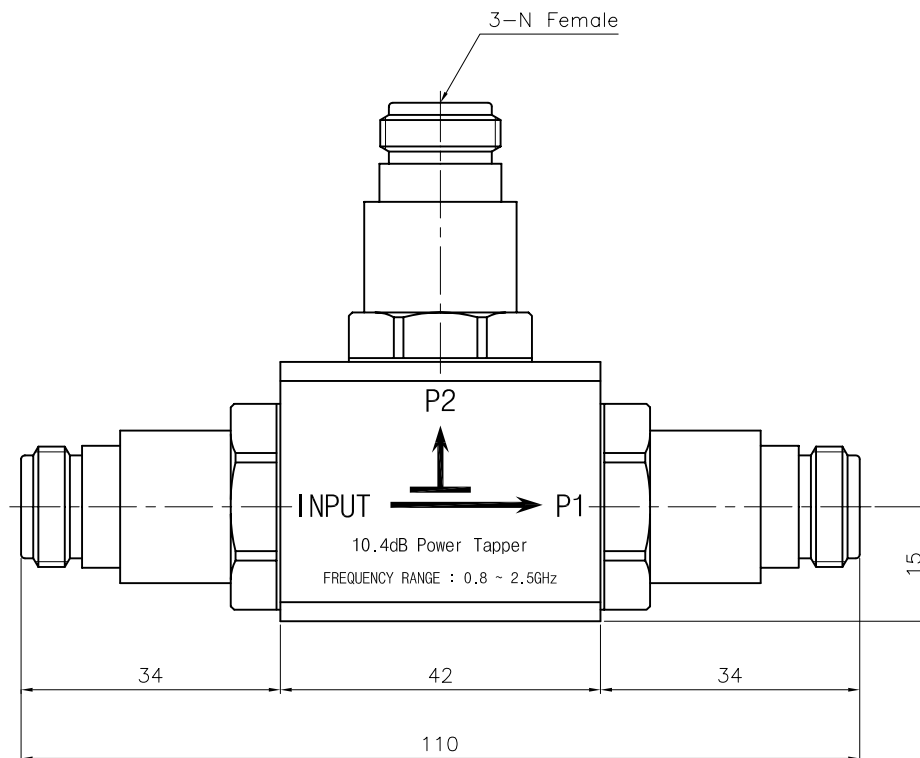

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 800.0 ~ 2500.0MHz
 Tap Loss (Input <-> P2): 10.4±0.6dB
 Insertion Loss (Input <-> P1): 1.0dB(Max)
 Input V.S.W.R (Max.) : 1.4 : 1
 PIM (@43.0dBm 2Tone) : -150.0dBc
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : MBsBD (SUCO Plate)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATIONS
 IP-67
 -35~75 °C

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS			
TOLERANCE	Decimal			DATE		2007. 5. 3.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017					
	± 0.5			APPROVED BY	J.H.YOUN								
	Angle			CHECKED BY	M.H.LEE								
MATERIAL		MBsBD		DRAWN BY		K.I.CHO	TITLE 10.4dB POWER TAPPER						
FINISH		SUCO Plate		SCALE	1/1	UNIT	mm			A4	DWG NO.	TP00002-7/1	
											SHEET	1	OF