
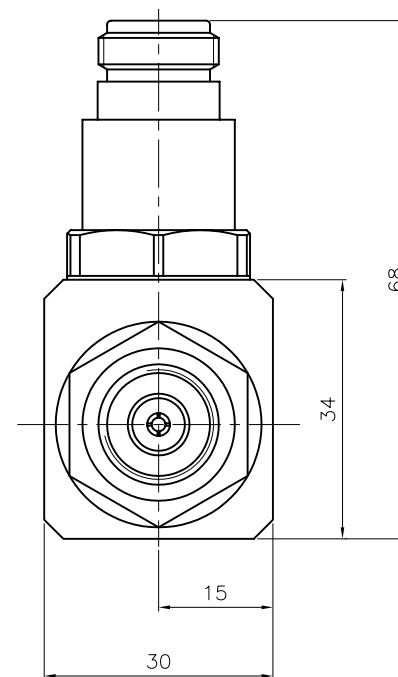


REVISION		
REV	DESCRIPTION	DATE
△		
△		

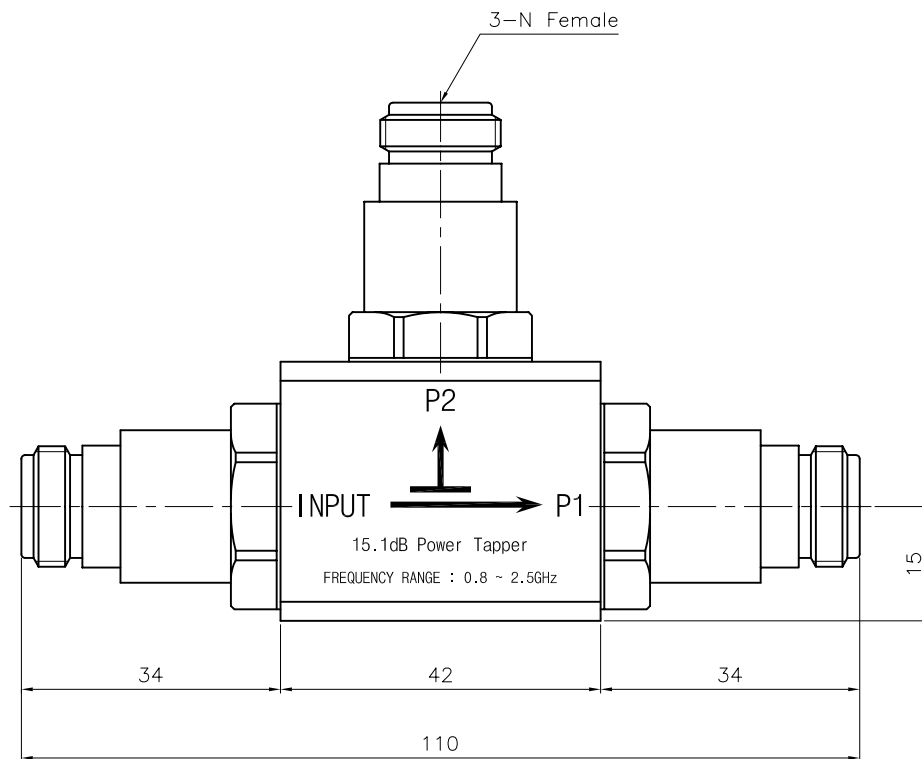

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 800.0 ~ 2500.0MHz
 Tap Loss(Input <=> P2): 15.1±0.6dB
 Insertion Loss (Input <=> P1): 0.7dB(Max)
 Input V.S.W.R (Max.) : 1.3: 1
 PIM (@43.0dBm 2Tone) : -150.0dBc
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : MBsBD (SUCO Plate)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	± 0.5		DATE		2007. 5. 3.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle	± 1°		APPROVED BY		J.H.YOUN				
					CHECKED BY		M.H.LEE			
MATERIAL		MBsBD		DRAWN BY		K.I.CHO		TITLE		
								15.1dB POWER TAPPER		
FINISH		SUCO Plate		SCALE		UNIT		A4		
				1/1		mm				
								SHEET 1 OF 1		