


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.04.22.

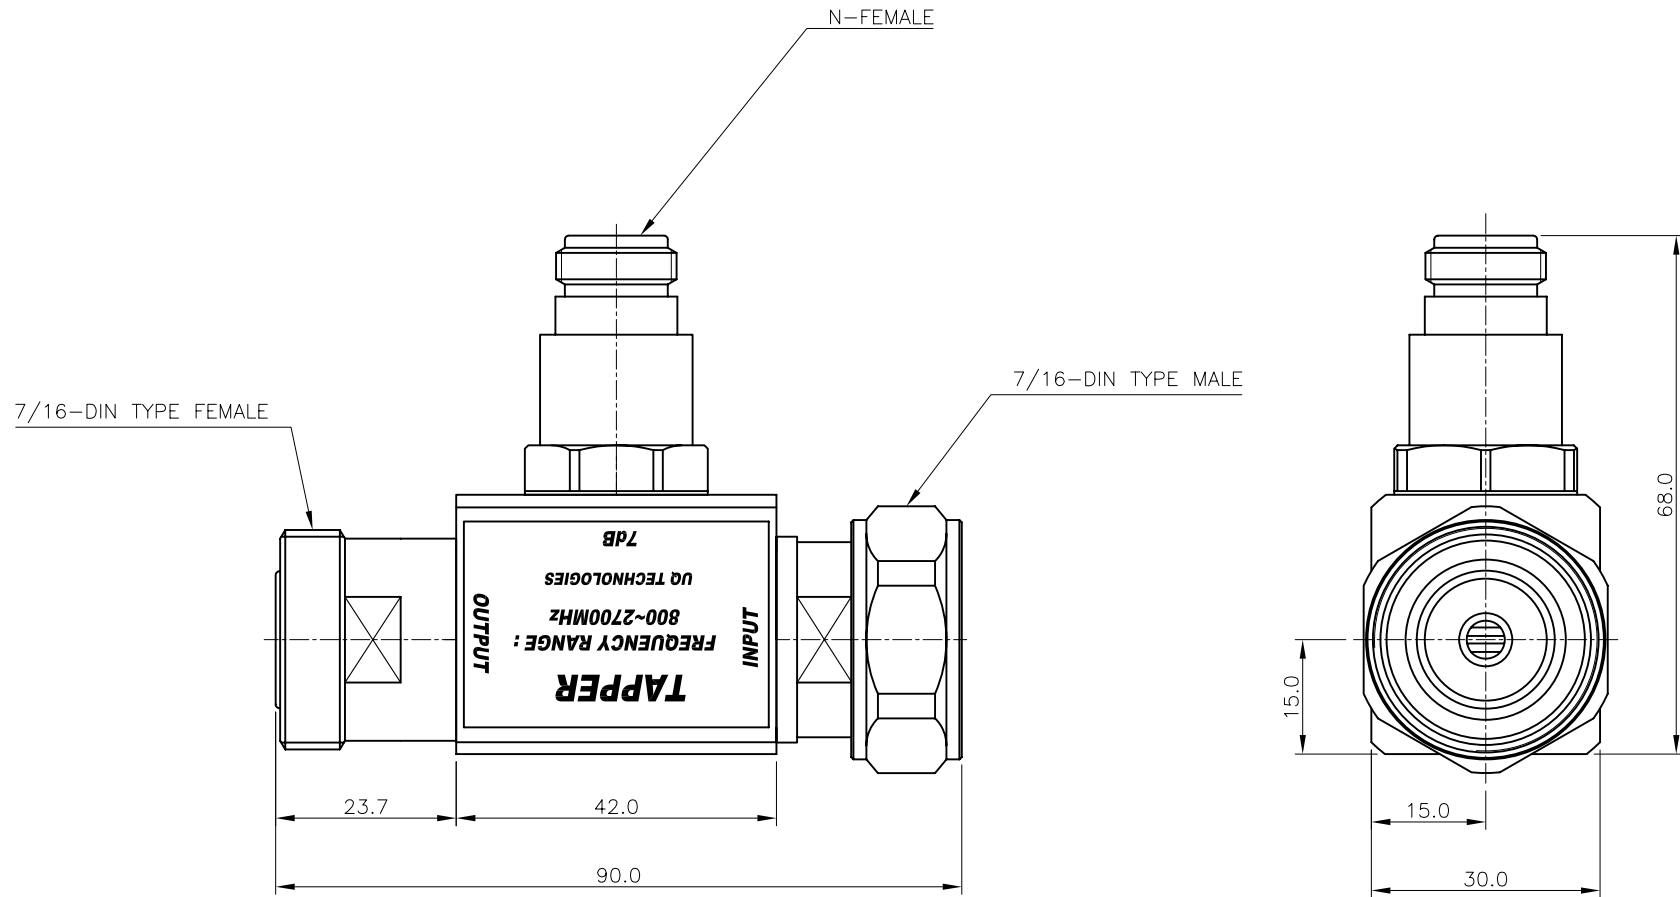

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 800.0 ~ 2700.0MHz

Tap Loss (Input <-> P2) : 7.0 ± 0.8 dB

Insertion Loss (Input <-> P1) : 1.5dB(Max)

Input V.S.W.R (Max.) : 1.4 : 1

PIM (@43.0dBm 2Tone) : -155.0dBc

Power Handling (Max.) : 100.0W

Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : MBsBD (SUCO Plate)

CONNECTORS : MBsBD (SUCO Plate)

CONNECTORS PINS : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2014. 04. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	MBsBD	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. TITLE 7dB POWER TAPPER
		DRAWN BY	S.L.SON	
FINISH	SUCO PLATE	SCALE	1/1	A4 DWG NO. TP00004-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	