


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.04.22.

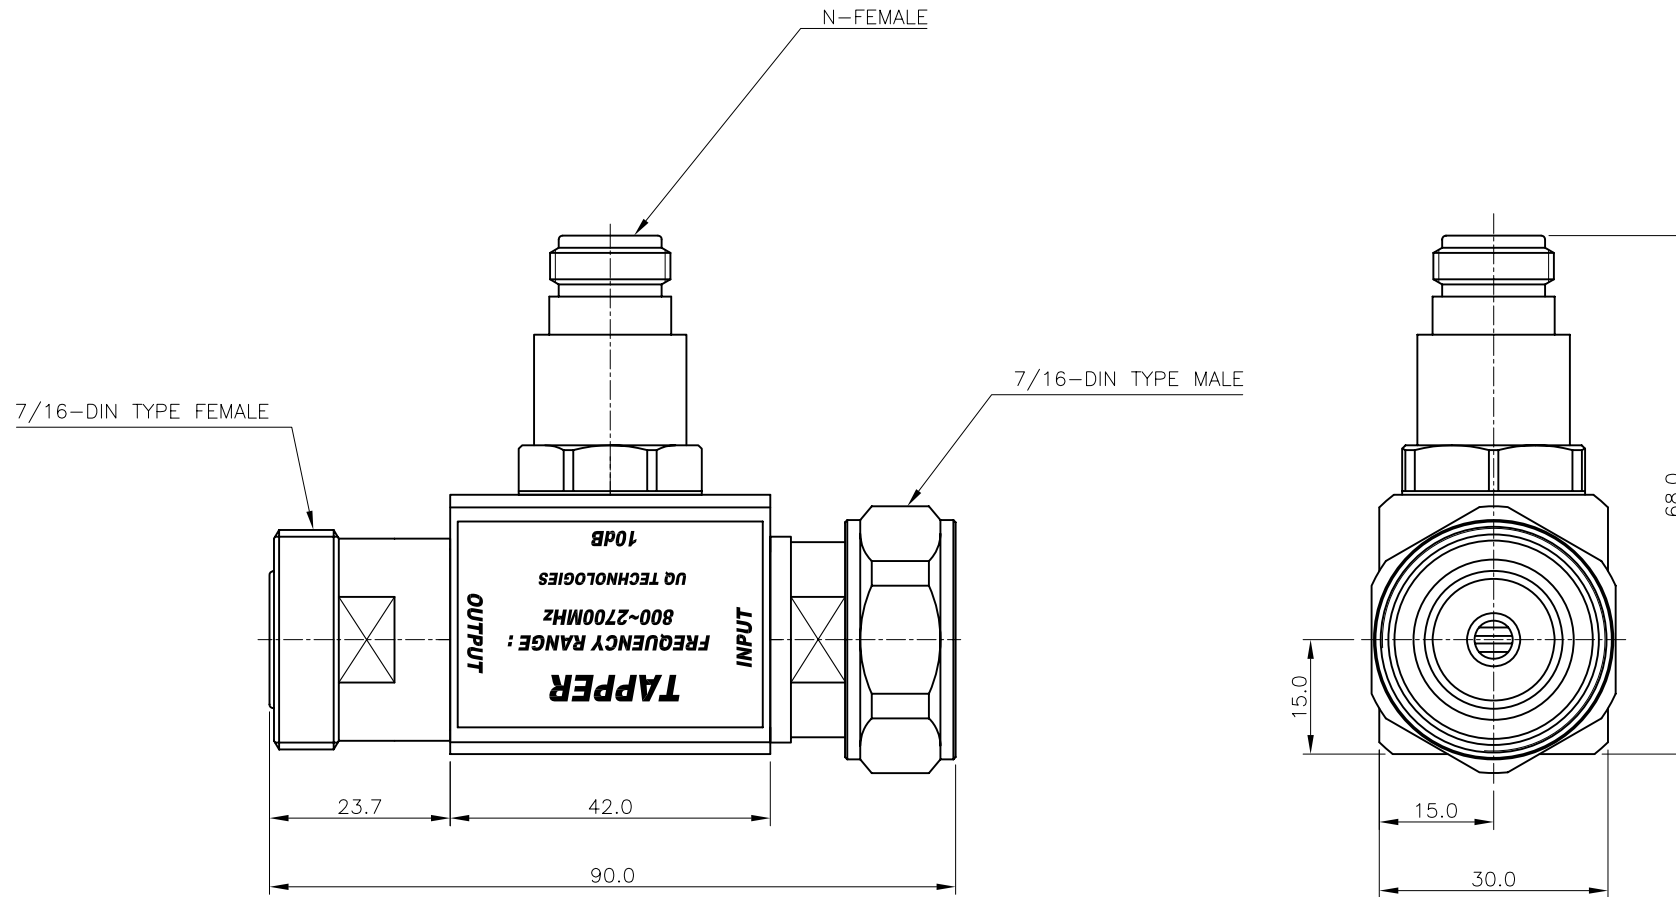

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 2700.0MHz
Tap Loss (Input <-> P2) : 10.0±0.8dB
Insertion Loss (Input <-> P1): 1.0dB(Max)
Input V.S.W.R (Max.) : 1.35 : 1
PIM (@43.0dBm 2Tone) : -155.0dBc
Power Handling (Max.) : 100.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : MBsBD (SUCO Plate)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2014. 04. 22.		
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	MBsBD	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
		DRAWN BY	S.L.SON	
FINISH	SUCO PLATE	SCALE	1/1	A4 DWG NO. TP00005-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	