


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2014.04.22.
2	LOGO변경 (KJ컴텍)	S.L.SON	J.H.YOUN	2015.10.14.

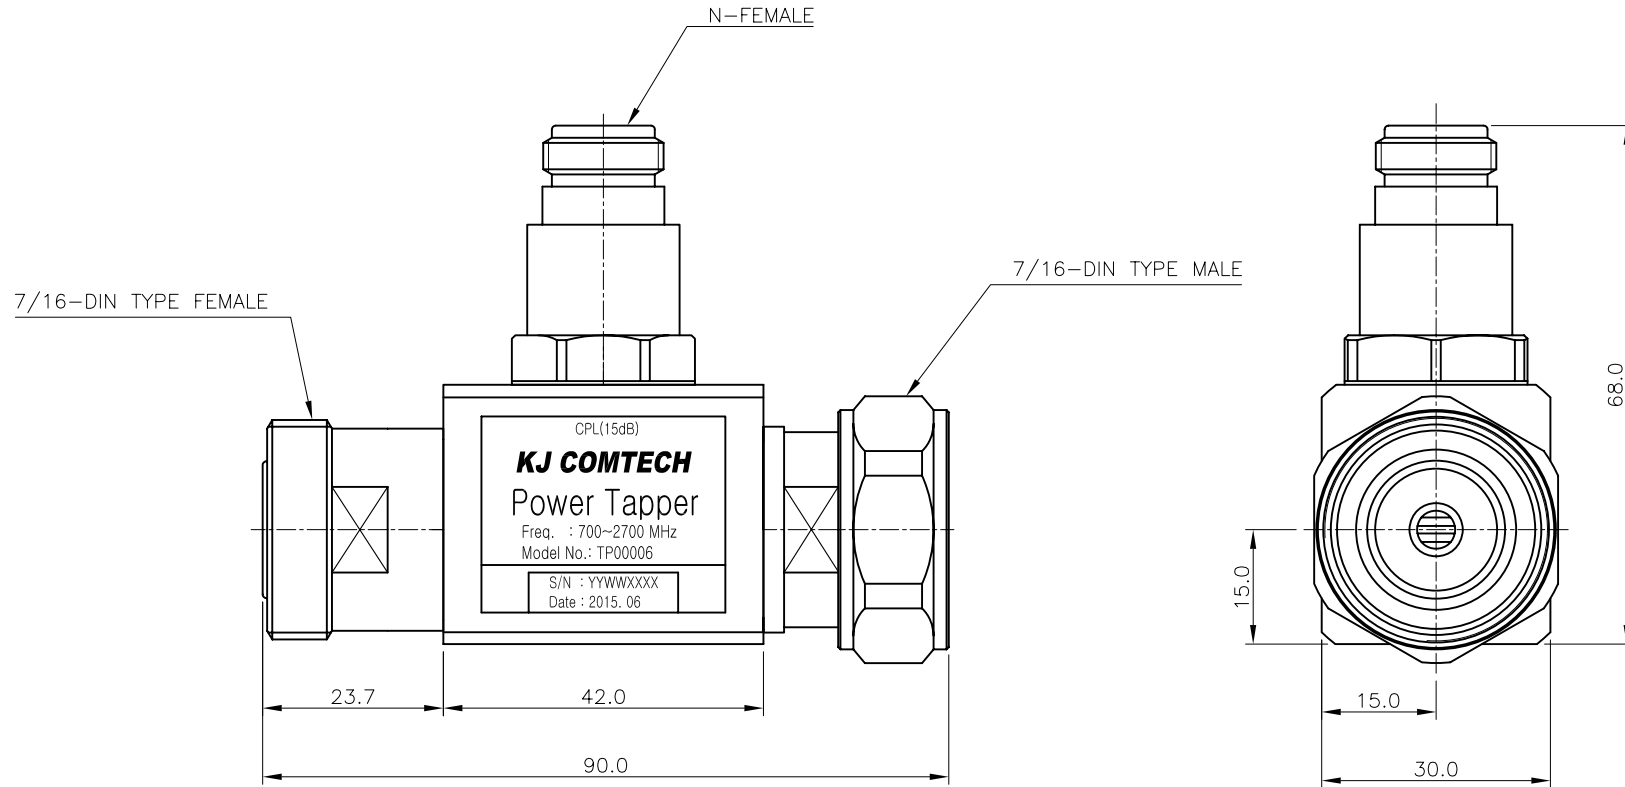

* ELECTRICAL SPECIFICATIONS

Frequency Range : 700.0 ~ 2700.0MHz
 Tap Loss (Input <-> P2) : 15.0±0.8dB
 Insertion Loss (Input <-> P1) : 0.7dB(Max)
 Input V.S.W.R (Max.) : 1.2 : 1
 PIM (@43.0dBm 2Tone) : -155.0dBc
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : MBsBD (SUCO Plate)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2014. 10. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	MBsBD	CHECKED BY	T.J.KIM	TITLE 15dB POWER TAPPER
		DRAWN BY	S.L.SON	
FINISH SUCO PLATE	SCALE 1/1	UNIT mm		DWG NO. TP00006-7/2
				REVISION 2 SHEET 1 of 1