


| REVISION |                      |         |          |             |
|----------|----------------------|---------|----------|-------------|
| REV      | DESCRIPTION          | DRAWN   | APPR     | DATE        |
| 1        | Initial Registration | S.L.SON | J.H.YOUN | 2015.03.05. |
|          |                      |         |          |             |

\* 인쇄 사양  
인쇄 색상 : BLACK  
글씨체 : 굴림 (굵게, 높이 4mm)

3-N TYPE FEMALE

-15dB

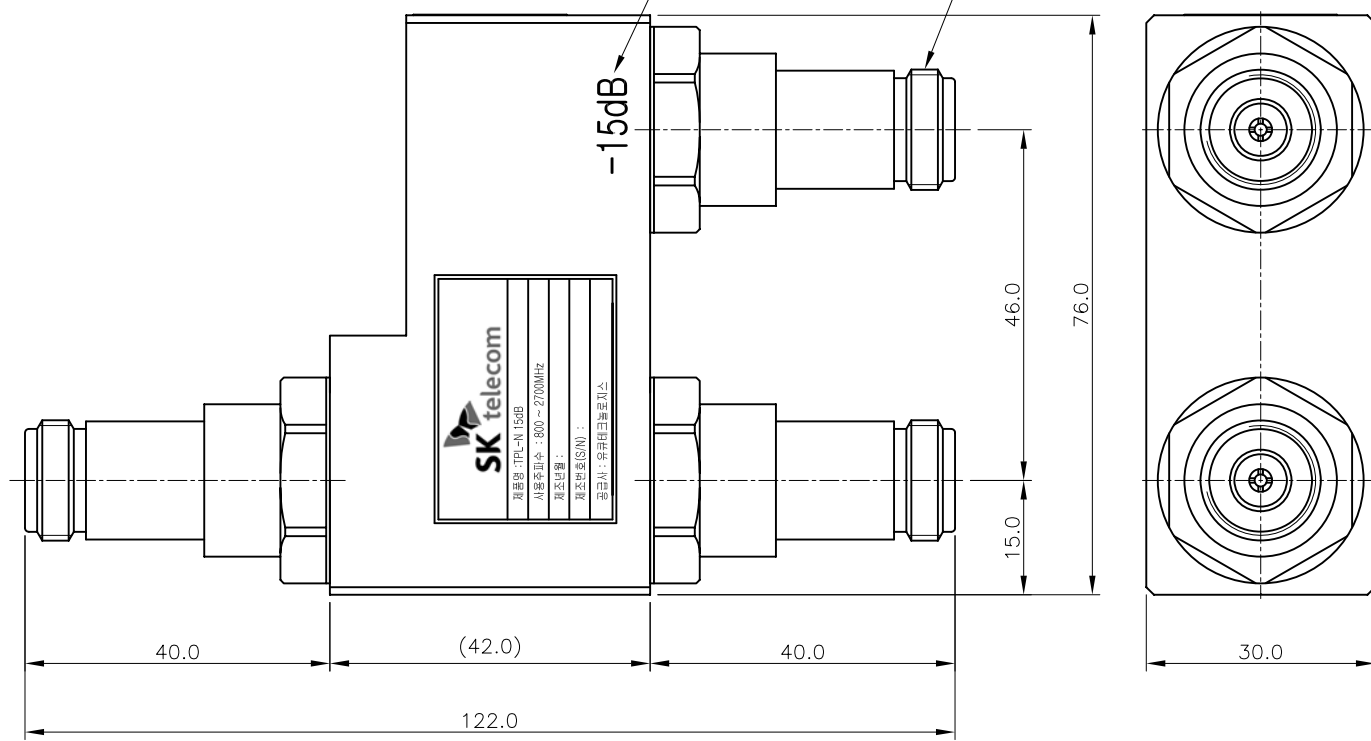

\* ELECTRICAL SPECIFICATIONS

Frequency Range : 800.0 ~ 2700.0MHz  
Tap Loss (Input <-> P2) : 15.0±0.8dB  
Insertion Loss (Input <-> P1): 0.7dB(Max)  
Input V.S.W.R (Max.) : 1.2 : 1  
PIM (@43.0dBm 2Tone) : -155.0dBc  
Power Handling (Max.) : 100.0W  
Impedance : 50Ω

\* MECHANICAL SPECIFICATIONS

HOUSING : A6061  
CONNECTORS : MBsBD (SUCO Plate)  
CONNECTORS PINS : Beryllium Copper (Silver Plate)  
INSULATORS : TEFLON

|           |         |                    |          |                                                                               |
|-----------|---------|--------------------|----------|-------------------------------------------------------------------------------|
| TOLERANCE | Decimal | DATE 2015. 03. 05. |          | <br>RF & MICROWAVE TECHNOLOGY<br>Tel : 82-32-347-8015<br>Fax : 82-32-347-8017 |
|           | Angle   | APPROVED BY        | J.H.YOUN |                                                                               |
| MATERIAL  | ±1°     | CHECKED BY         | T.J.KIM  | TITLE<br>15dB POWER TAPPER                                                    |
|           | A6061   | DRAWN BY           | S.L.SON  |                                                                               |
| FINISH    | DIC-547 | SCALE              | 1/1      | DWG NO. TP00012-8/1<br>REVISION 1 SHEET 1 of 1                                |
|           |         | UNIT               | mm       |                                                                               |

A4