


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.02.26.

* 인쇄 사양
인쇄색상 : BLACK
글씨체 : 굴림 (굵게, 높이 4mm)

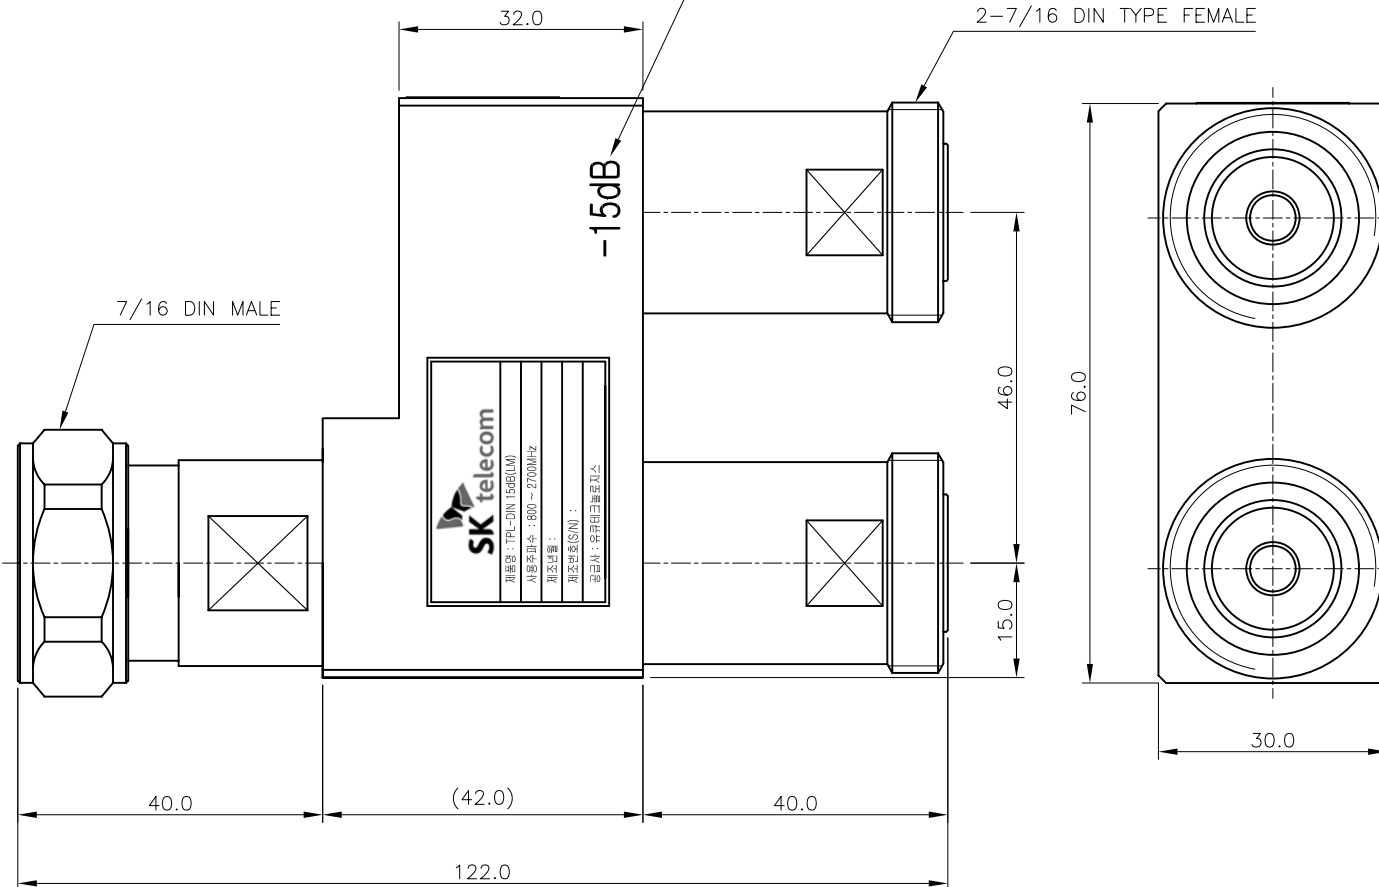

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800.0 ~ 2700.0MHz
Tap Loss (Input <-> P2) : 15.0±0.8dB
Insertion Loss (Input <-> P1): 0.7dB(Max)
Input V.S.W.R (Max.) : 1.2 : 1
PIM (@43.0dBm 2Tone) : -155.0dBc
Power Handling (Max.) : 100.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2015. 02. 26.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY	T.J.KIM	TITLE 15dB POWER TAPPER
	A6061	DRAWN BY	S.L.SON	
FINISH	DIC-547	SCALE	1/1	DWG NO. TP00018-8/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	