


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.04.20.

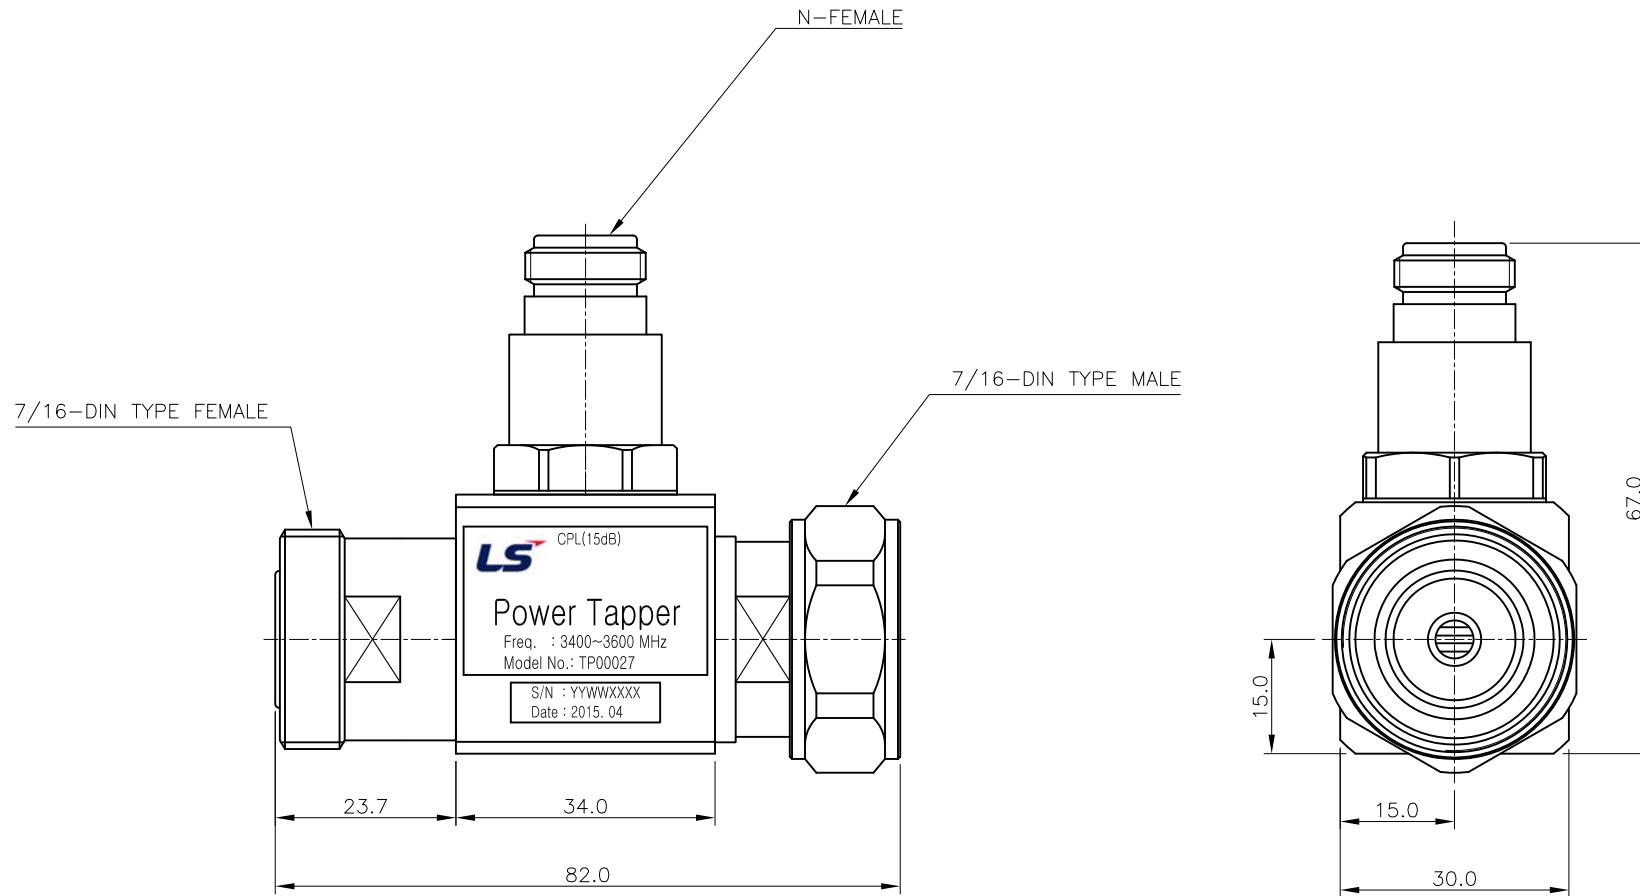

* ELECTRICAL SPECIFICATIONS

Frequency Range : 3400.0 ~ 3600.0MHz

Tap Loss (Input <-> P2) : 15.0±0.8dB

Insertion Loss (Input <-> P1): 0.4dB(Max)

Input V.S.W.R (Max.) : 1.2 : 1

PIM (@43.0dBm 2Tone) : TBD

Power Handling (Max.) : 250.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : MBsBD (SUCO Plate)

CONNECTORS : MBsBD (SUCO Plate)

CONNECTORS PINS : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2015. 04. 20.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN		
	±1°	CHECKED BY	T.J.KIM		
MATERIAL	MBsBD (C3604BD-F)	DRAWN BY	S.L.SON		TITLE 15dB POWER TAPPER
FINISH		SUCO PLATE			
SCALE 1/1		UNIT mm		A4	DWG NO. TP00027-7/1
					REVISION 1