


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.06.26.
2	LOGO 변경 (KJ컴텍)	S.L.SON	J.H.YOUN	2015.09.11.

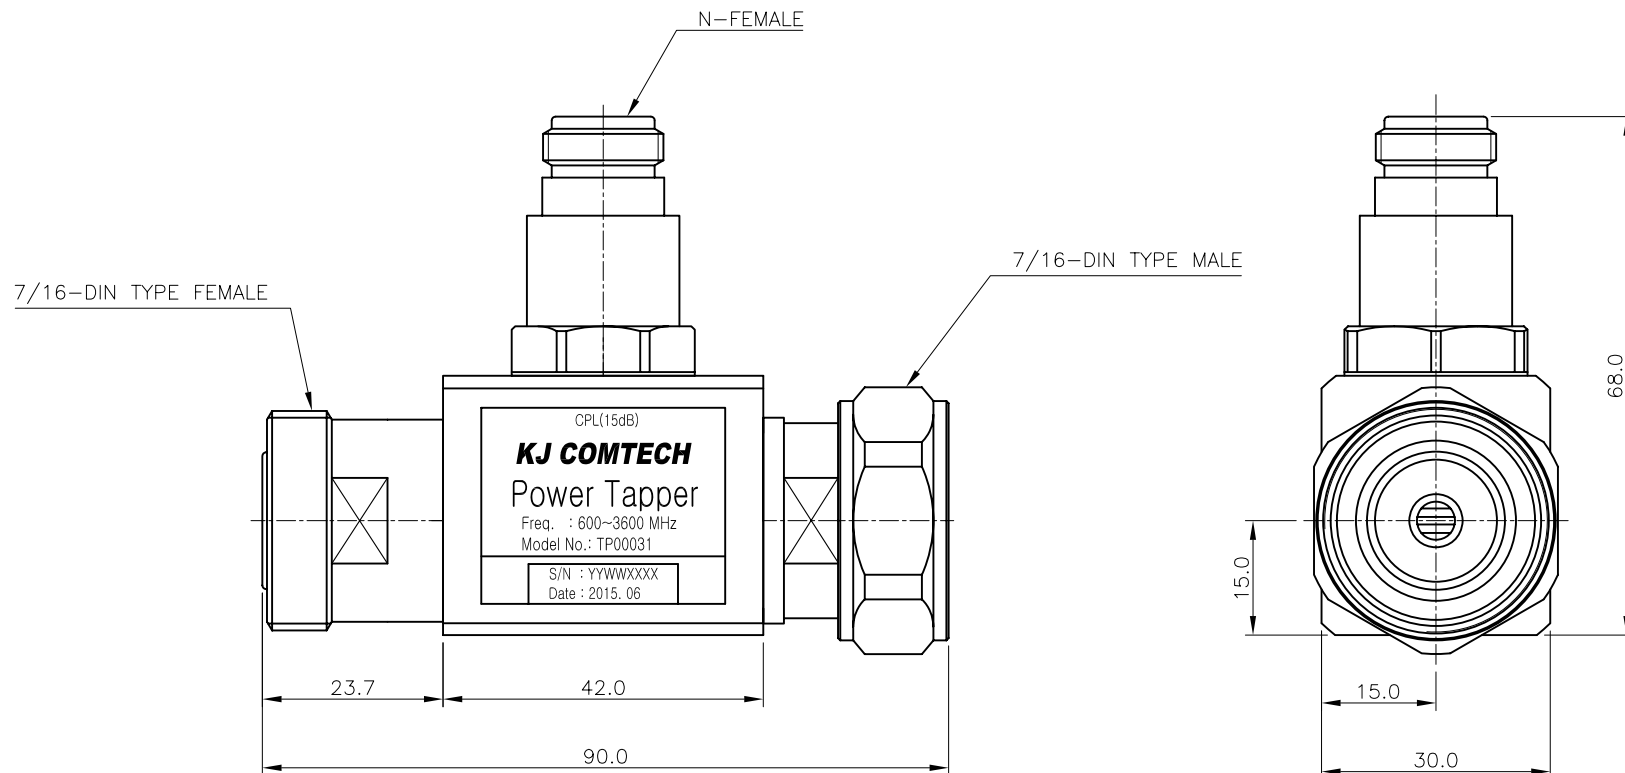

* ELECTRICAL SPECIFICATIONS

Frequency Range : 600.0 ~ 3600.0MHz
 Tap Loss (Input <-> P2) : 15.0±1.0dB
 Insertion Loss (Input <-> P1) : 0.7dB(Max)
 Input V.S.W.R (Max.) : 1.2 : 1
 PIM (@43.0dBm 2Tone) : -155.0dBc
 Power Handling (Max.) : 100.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : MBsBD (SUco Plate)
 CONNECTORS : MBsBD (SUco Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2015. 09. 11.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL MBsBD (C3604BD-F)	FINISH SUCO PLATE	CHECKED BY		T.J.KIM		TITLE 15dB POWER TAPPER
		DRAWN BY		S.L.SON		
		SCALE 1/1	UNIT mm		A4	DWG NO. TP00031-7/2
					REVISION 2	SHEET 1 of 1