
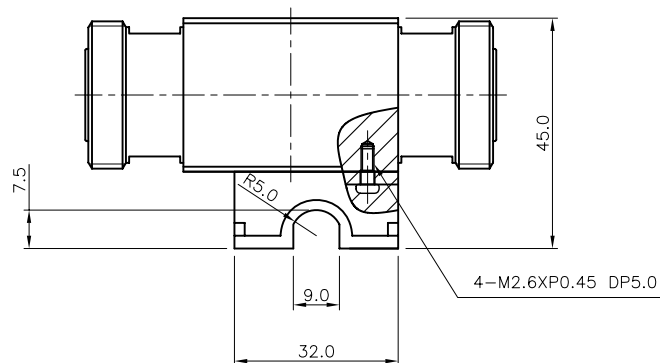
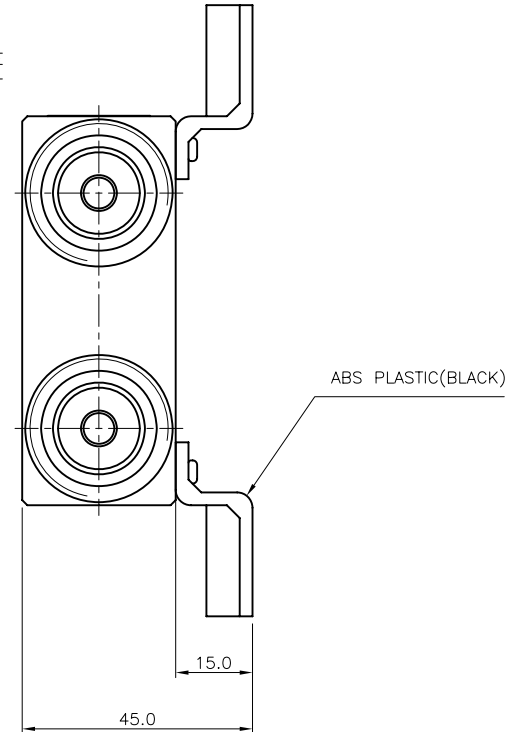


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration (Catalogue)	S.L.SON	J.H.YOUN	2015.10.14.

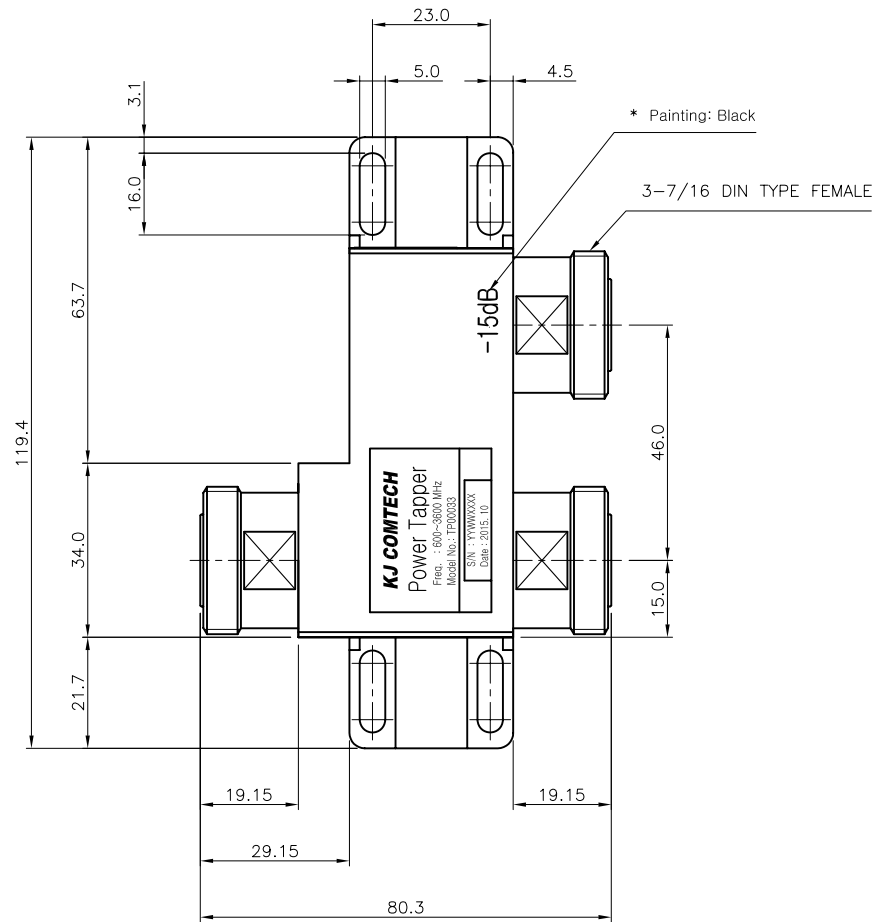

* ELECTRICAL SPECIFICATIONS
Frequency Range : 600.0 ~ 3600.0MHz
Tap Loss (Input <-> P2) : 15.0±1.0dB
Insertion Loss (Input <-> P1): 0.7dB(Max)
Input V.S.W.R (Max.) : 1.2 : 1
PIM (@43.0dBm 2Tone) : -155.0dBc
Power Handling (Max.) : 100.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE	2015. 10. 14.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	T.J.KIM	KJ COMTECH CO.,LTD. TITLE 15dB POWER TAPPER
		DRAWN BY	S.L.SON	
FINISH	DIC-547	SCALE	1/1	A3 DWG NO. TP00033-8/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	