
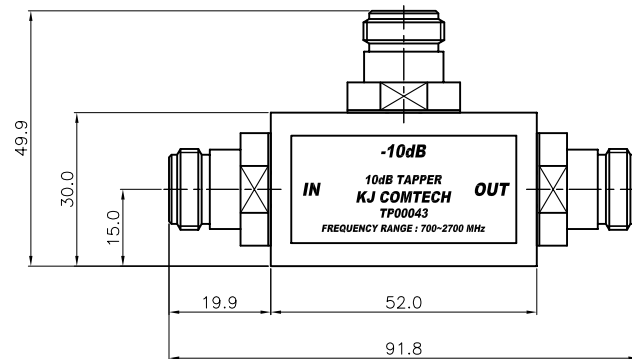


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2016.02.23.

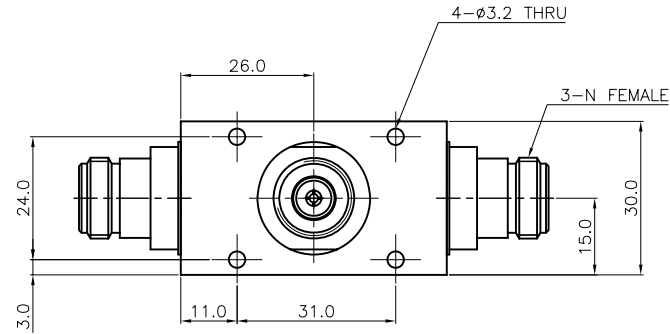

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~2700MHz
Tap Loss : 10.0 ± 0.8 dB
Insertion loss (Max.) : 0.8dB
Input V.S.W.R (Max.) : 1.2 : 1
PIMD (Max.) : -155dBc (@ 43dB 2tone)
Power Handling (Max.) : 500.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (DIC-547)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATION
IP-65

TOLERANCE	Decimal ± 0.3	DATE 2016. 02. 23.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE 10dB POWER TAPPER
	Angle $\pm 1^\circ$	APPROVED BY J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY S.L.SON	 KJ COMTECH CO.,LTD.	DWG NO. TP00043-6/1
		DRAWN BY T.J.KIM		
FINISH DIC-547	SCALE 1/1	UNIT mm	 A3	REVISION 1
		SHEET 1 of 1		