


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2016.02.23.

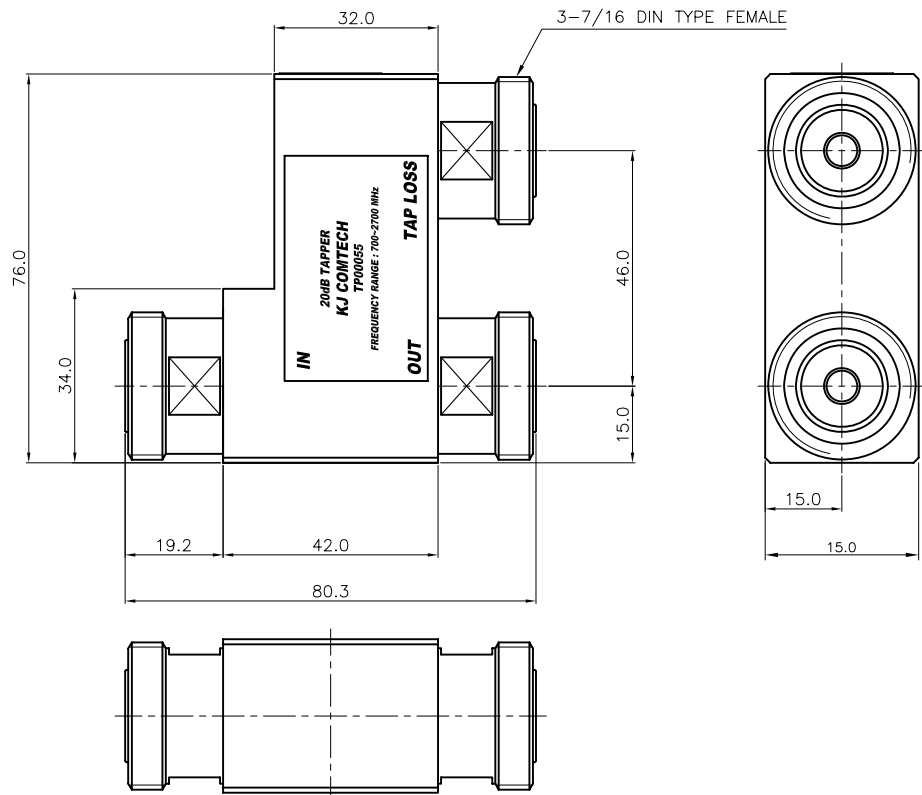

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~2700MHz
Tap Loss : 20.0 ± 0.8 dB
Insertion loss (Max.) : 0.5dB
Input V.S.W.R (Max.) : 1.2 : 1
PIMD (Max.) : -155dBc (@ 43dB 2tone)
Power Handling (Max.) : 500.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 (DIC-547)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATION
IP-65

TOLERANCE	Decimal	DATE		2016. 02. 23.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY	J.H.YOUN		KJ COMTECH CO.,LTD.		
MATERIAL	$\pm 1^{\circ}$	CHECKED BY	S.L.SON			TITLE	
	A6061 T6	DRAWN BY	T.J.KIM		20dB POWER TAPPER		
FINISH	DIC-547	SCALE	UNIT		A3		
		1/1	mm			DWG NO. TP00055-6/1	
				REVISION	1	SHEET	1 of 1