

AD00017-7/2

AD00017-7/2



SMA (J) TNC (P)
ST L:29.3mm
BO/NI,PI/GO,CAP/NI

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21 (dB)

■ _1.0GHz - 1.09, 1.09, 0.04
■ _2.0GHz - 1.25, 1.25, 0.01
■ _3.0GHz - 1.40, 1.44, 0.08
■ _4.0GHz - 1.37, 1.39, 0.10
■ _5.0GHz - 1.56, 1.59, 0.22
■ _6.0GHz - 1.55, 1.57, 0.27
■ _7.0GHz - 1.36, 1.33, 0.17
■ _8.0GHz - 1.63, 1.66, 0.32

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor


■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)


통신규제 품으로
리비전필요

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

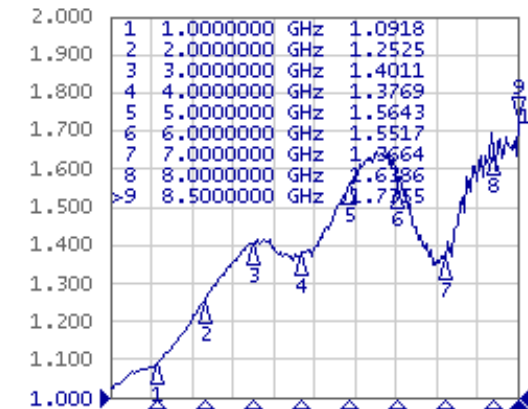

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

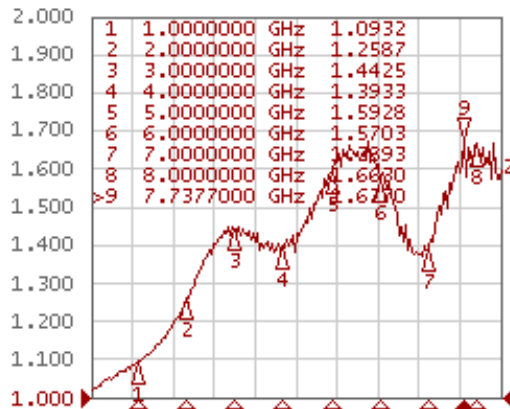

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 30 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc

2020-02-24 15:07

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight

ON

Firmware

Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)