


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2023.01.17.

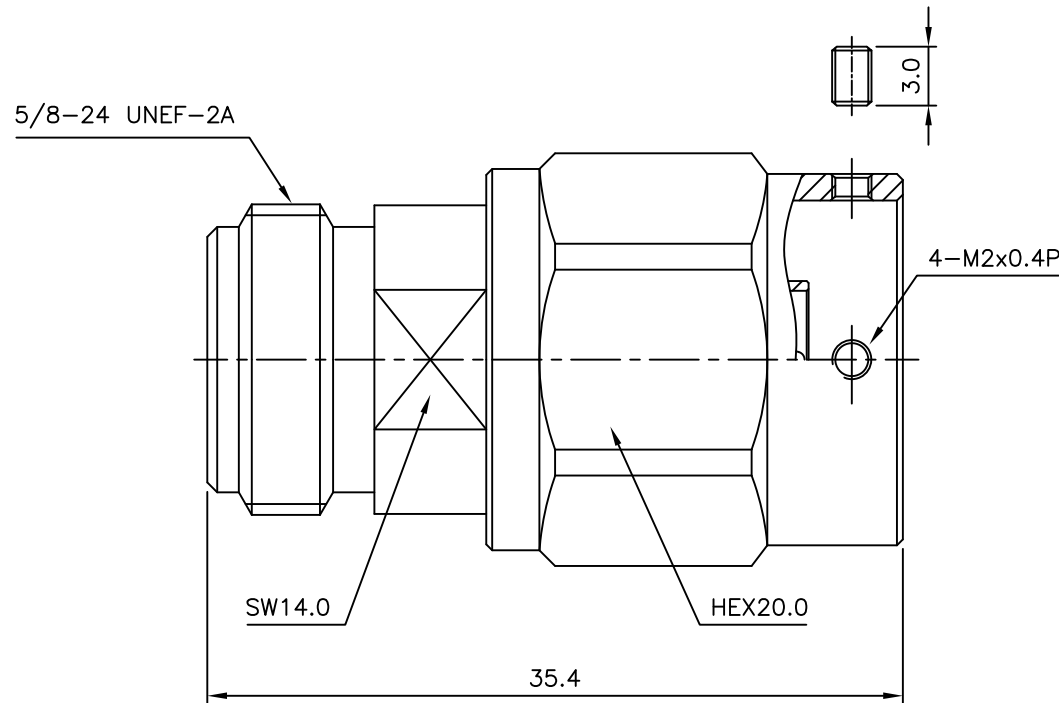


* ELECTRICAL SPECIFICATIONS
Impedance : 50Ω
Frequency Range : DC~6GHz
V.S.W.R (Max) : 1.25

7	BOLT	4	SUS304	Passivated	DBT01118-N/1 (M2.3mm)
6	SPRING	1	PBR	Nickel Plate	DSR00020-5/1
5	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02327-5/1
4	GASKET	1	SILICONE	RED	DGK00013-N/1
3	INSULATOR	1	TEFLON		DAI00132-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00240-5/3
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00431-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE


<체결도>

* 상대물 체결 후 풀려지지 않도록 무드볼트를 이용하여 조이는 목적

무드볼트 M2x0.4P 3mm

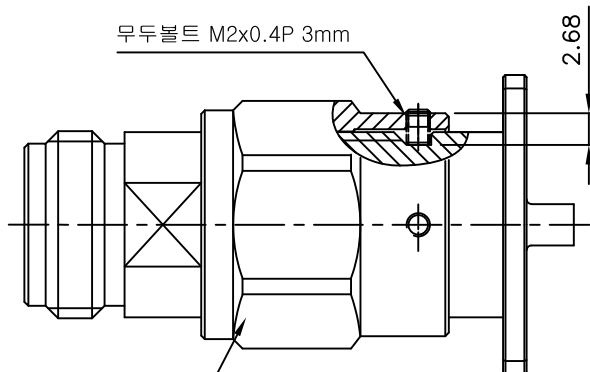

N50 (J) N50 (P) ADAPTOR

TOLERANCE	Decimal ±0.1	DATE 2023. 01. 17.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY	S.H.KIM			
MATERIAL _____	CHECKED BY	TITLE N50 (J) N50 (P) ST ADAPTOR				
	DRAWN BY					S.Y.EUN
FINISH _____	SCALE 2.5/1	UNIT mm		A4	DWG NO. AD00137-7/4	
					REVISION	I R