


AD00233-7/1

H/CUT-13.4



SMA (J) TNC (J) BH
L:32.3mm(7-3.2-22.1)
BO/NI, PI/GO

AD00233-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz	- 1.03, 1.03, 0.03
■ _2.0GHz	- 1.09, 1.09, 0.03
■ _3.0GHz	- 1.01, 1.03, 0.03
■ _4.0GHz	- 1.08, 1.08, 0.03
■ _5.0GHz	- 1.03, 1.03, 0.01
■ _6.0GHz	- 1.09, 1.10, 0.03

■ _7.0GHz	- 1.42, 1.45, 0.19
■ _8.0GHz	- 1.35, 1.37, 0.14



► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

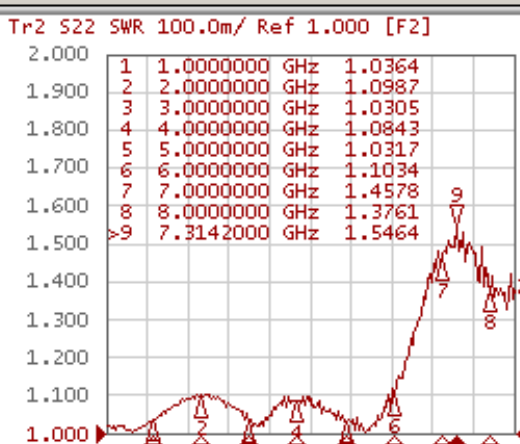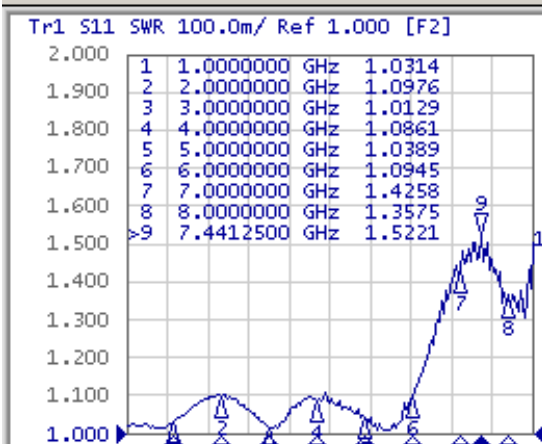

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 30 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2020-02-24 15:05

System

Print

Abort Printing

Printer Setup...

Invert Image
ON

Dump
Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight
ON

Firmware
Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)