


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			2005.08.11.

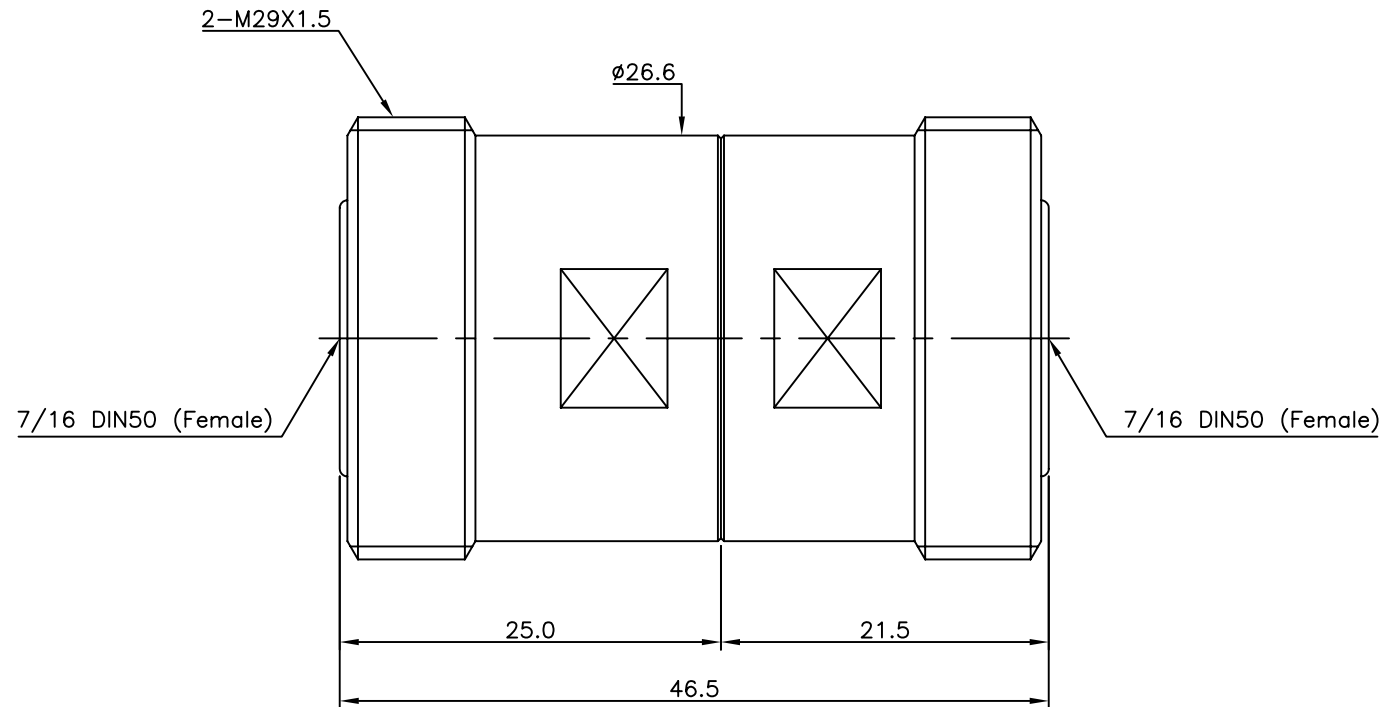

ENVIRONMENTAL DATA :

1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)
5. PIMD (-43dBm / 2tone) 3rd Order IMD : -160dBc (Min)

5	INSULATOR	2	TEFLON		DIN00942-N/1
4	CONTACT	2	BeCu C17300	Silver Plate (5μm)	DCT01058-5/1
3	CONTACT	1	MBsBD C3604BD-F	Silver Plate (5μm)	DCT01057-5/1
2	BODY (B)	1	MBsBD C3604BD-F	SUCO Plate	DBD01410-5/1
1	BODY (A)	1	MBsBD C3604BD-F	SUCO Plate	DBD01409-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2005. 08. 11.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 (J) 7/16 DIN50 (J) ADAPTOR
		DRAWN BY		
FINISH		SCALE 3/1	UNIT mm	 A4 DWG NO. AD00300-7/1 REVISION I R SHEET 1 of 1